



2015 GENERAL CATALOGUE

Instruments for Water Analysis



www.milwaukeeinst.com

Measurements made Easy




COMMITTED TO TOTAL CUSTOMER SATISFACTION

Milwaukee is a dynamic worldwide manufacturer of electrochemical Instrumentation for water analysis to measure pH, Redox, Conductivity, Salinity, Dissolved Oxygen, Temperature, Turbidity, Chlorine, Ammonia, Copper, Chloride, Phosphate, Iron, etc.

Milwaukee serves all markets where water quality measurements are required: Laboratory market, food and beverage, environmental, education and government, water and waste water treatment, pharmaceutical and biotechnology, chemical, agriculture and horticulture, hydroponics, aquariums, swimming pools, etc.

Thanks to your valuable feedback our R&D team has designed a new line of instruments for laboratory and field measurements.

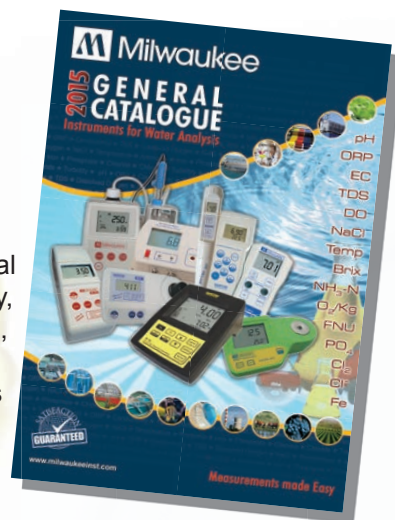

Many of our instruments combine 2 or more parameters providing added versatility and excellent value for money. With an extended range of products, from basic hand held instruments to high performance laboratory bench meters, Milwaukee products have a reputation for reliability and accuracy.

All of our instruments are supplied with probes, electrode holders, buffer solutions and most come in a hard carrying case and are complete and ready for use.

Milwaukee Instruments are available worldwide through a selected network of distributors and associated companies that are committed to Total Customer Satisfaction.

Everyone in Milwaukee Instruments is committed to exceeding your expectations.

Global Offices



**Europe, South America, Africa,
Asia, Middle East and Pacific Rim**

Milwaukee Electronics Kft.

Alsókikötő sor 11.
H-6726 Szeged - HUNGARY
tel: +36 62 428 050
fax: +36 62 428 051
e-mail: sales@milwaukeeinst.com

























United States of America

Milwaukee Instruments, Inc.

2950 Business Park Drive
Rocky Mount - NC 27804 - U.S.A.
tel: +1 252 443 3630
fax: +1 252 443 1937
e-mail: sales@milwaukeetesters.com

Beauty of

Symbols

	CE CE Certified products
	IP65 IP 65 rated housing protects instrument from water and dust
	GLP (Good Laboratory Practices) Good Laboratory Practices requires that time and date should be recorded with the parameters measured
	USB Port Communication via opto-isolated USB port
	RS232 Port Communication via opto-isolated RS232 port
	2 Years Warranty Instruments are covered by 2 years warranty
	3 Years Warranty Instruments are covered by 3 years warranty
	7 pH Memorized buffers 7 pH Memorized buffers for calibration
	MEM MEM key allows to memorize the last measurement
	LOG LOG key allows to save up to 50 measurements
	ALARM A LED light warns the user in the event the reading is outside the set point
	2 Point Calibration Calibration can be performed at 1 or 2 points
	3 Point Calibration Calibration can be performed at 1, 2 or 3 points
	Multiparameter instruments Instruments that measure more than 1 parameter
	Automatic Temperature Compensation Automatically corrects the measured value based on the temperature of the solution
	Manual Temperature Compensation Is a method for temperature compensation through the manual input of sample temperature value
	Auto-Buffer Auto-Buffer Recognition ensures that correct buffer values are used during calibration
	Dual Level Display Displays simultaneously 2 parameters
	Replaceable Electrode Instrument with replaceable electrode
	Software CD The instrument is supplied with an application software
	Self-diagnostics Messages Messages on the LCD to make the calibration easy and accurate
	LED The lightsource is the LED with different wavelengths

Contents

Highlights	2
pH/ORP/ISE/Temp Measurements	
pH/Temp Bench Meter	3
pH/ORP/Temp Bench Meter	4
pH/ORP/ISE/Temp Bench Meter	5
pH Electrodes	
pH Electrodes basic	6
pH/ORP/ISE/Temp Measurements	
pH/Temp Portable Meter (Professional)	10
pH/ORP/Temp Portable Meter (Professional)	11
Standard pH/ORP/Temp Portable Meters	12
pH Measurements in Soil	13
pH Measurements in Cheese	14
pH/Temp Pocket Testers (Professional)	15
pH/ORP/Temp Pocket Testers (Professional)	16
pH Monitors	17
pH Controller and Pump	18
pH/ORP Controllers	19
Conductivity/TDS/NaCl/Temp Measurements	
EC/TDS/NaCl/Temp Bench Meter	20
EC/TDS/NaCl/Temp Portable Meter (Professional)	21
Standard EC/TDS Portable Meters	22
EC/TDS/Temp Pocket Testers (Professional)	23
EC Monitors	24
TDS Monitors	25
Dissolved Oxygen/Temp Measurements	
DO/Temp Bench Meter	26
DO/Temp Portable Meter (Professional)	27
Standard DO/Temp Portable Meter	28
Multiparameter Measurements	
pH/ORP/EC/TDS/NaCl/Temp Bench Meter	29
pH/EC/TDS/Temp Portable Meters (Professional)	30
Standard pH/EC/TDS Portable Meters	31
Light Measurements	
LUX Portable Meter	32
Colorimetric Measurements	
Free, Total Chlorine &	
pH Portable Photometer	33
Ammonia, Iron &	
Phosphate Portable Photometers	34
Free, Total Chlorine &	
Chloride Portable Photometers	35
Handy Photometers: Free & Total Chlorine	36
Handy Photometers: Phosphate, Iodine, Iron	37
Peroxide Value Photometer	38
Turbidity Measurements	
Turbidity Portable Meter	39
Refractometers	
Digital Refractometers for Brix, Fructose, Glucose and Invert Sugar Measurements	40
Digital Refractometers for Wine and Grape Product Measurements	41
Digital Refractometer for Sodium Chloride Measurements	42
Salt in Cheese Measurements	43
Digital Refractometer for Seawater Measurements	44
Digital Refractometer for Ethylene Glycol Measurements	45
Economical Pocket-Testers	46
Thermometers & NPK Test Kit	47
pH Measurement in Meat	48
Electrode Cleaning	49
Electrodes & Probes	50
Electrode selection guide	51
Calibration, Maintenance & Cleaning Solutions	52

Simplicity

Highlights in this Catalogue

MW101 with MA918B/1 pH electrode for soil measurements

Milwaukee offers a specific pH electrode **MA918B/1** that will enable the user to measure pH values directly in the soil. You will find a step by step guide on how to prepare the sample of soil to be measured with pictures on page 13.



New Line of pH/ORP/EC and TDS Monitors and Controllers

The new MC Monitors are designed to continuously monitor pH, ORP, EC or TDS values directly in your reservoir. Each unit features a user selectable set-point. An LED visual alarm is activated and flashes when the pH, ORP, EC or TDS level rises either Above or Below (user selected) that set-point.

The new Milwaukee MC Controllers have a user selectable set point and a visual "Power Activated" LED notification light. Power to the controller box is turned on when the reading is Above or Below (user selected) the selected set point. These MC Controllers are ideal for CO₂ or ozone dosing.

Mi180: Multi parameter pH, ORP, Conductivity, TDS, NaCl and Temperature Bench Meter

Mi180 measures 6 different parameters: pH, ORP, EC, TDS (Total Dissolved Solids), percentage of NaCl and temperature in a variety of ranges. pH calibration can be performed in 3 points selectable between 7 memorized buffers, to provide a very accurate calibration curve even when testing different samples, where very wide differences in pH can be found.

The auto-ranging feature for EC and TDS measurements automatically sets the resolution suitable to the tested sample. All measurements can be temperature compensated at 20 or 25°C and the compensation coefficient is selectable by the user. The automatic temperature compensation can also be disabled for measuring the actual conductivity value.

The stability indicator on the LCD ensures accuracy. Conductivity readings are performed with the 4-ring probe supplied with the meter. The GLP feature allows users to store and recall data on system status. PC compatible through an RS232 port or USB.



MA871: Digital Brix Refractometer

The **MA871** is an optical instrument that employs the measurement of refractive index to determine the % Brix of sugar in aqueous solutions. The method is both simple and quick. Samples are measured after a simple user calibration with deionized or distilled water. Within seconds the instrument measures the refractive index of the sample and converts it to % Brix concentration units.

The **MA871** digital refractometer eliminates the uncertainty associated with mechanical refractometers and is easily portable for measurements in the field.

Mi150

pH/Temperature Laboratory Bench Meter

Mi150 is an advanced pH/Temp microprocessor-based bench meter. It is ideal for students and technicians who need fast and reliable measurements.

This meter is provided with a series of new diagnostic features which add an entirely new dimension to the measurement of pH, by allowing the user to dramatically improve the reliability of the measurement:

- Automatic Temperature Compensation (ATC) for good accuracy under fluctuating temperatures;
- Easy to read large custom LCD;
- Easy and Quick Push-button Calibration
- 7 memorized buffers (pH 1.68, 4.01, 6.86, 7.01, 9.18, 10.01 and 12.45) for calibration;
- Messages on the LCD to make the calibration easy and accurate;
- User-selectable "calibration time out" to remind when a new calibration is necessary;
- Stability Indicator prompts whenever reading stabilizes.

Moreover, it offers an extended temperature range from -20°C (-4°F) to 120°C (248°F), using the **MA831R** interchangeable temperature probe.



Specifications		Mi150
Range	pH	-2.00 to 16.00 pH
	Temp	-20.0 to 120.0°C / -4.0 to 248.0°F
Resolution	pH	0.01 pH
	Temp	0.1°C / 0.1°F
Accuracy (@20°C / 68°F)	pH	±0.01 pH
	Temp	±0.4°C / ±0.8°F
Typical EMC	pH	±0.02 pH
Deviation	Temp	±0.4°C / ±0.8°F
pH Automatic Calibration		1 or 2 point calibration with 7 memorized buffers
Offset Calibration		±1 pH
Slope Calibration		from 80 to 108%
Temperature Compensation		automatic from -20.0 to 120.0°C / -4.0 to 248.0°F or manual, without temperature probe
pH Electrode		MA917B/1 (included)
Temperature Probe		MA831R (included)
Environment		0 to 50°C / 32 to 122°F; max RH 95%
Input Impedance		10 ¹² Ohm
Power Supply		12 VDC power adapter (included)
Dimensions		230 x 160 x 95 mm
Weight		0.9 kg

Accessories

- MA9001** pH 1.68 buffer solution, 230 mL bottle
MA9004 pH 4.01 buffer solution, 230 mL bottle
MA9006 pH 6.86 buffer solution, 230 mL bottle
MA9007 pH 7.01 buffer solution, 230 mL bottle
MA9009 pH 9.18 buffer solution, 230 mL bottle
MA9010 pH 10.01 buffer solution, 230 mL bottle
MA9012 Refilling solution for double junction electrode, 230 mL bottle
MA9015 Electrode storage solution, 230 mL bottle



- MA9016** Electrode cleaning solution, 230 mL bottle
MA9112 pH 12.45 buffer solution, 230 mL bottle
MA9310 12 VDC Adapter, 220 V
MA9311 12 VDC Adapter, 110 V
MA9315 Electrode Holder
MA917B/1 Glass body, double junction refillable pH electrode
MA831R Temperature probe

Glass Electrode & Temperature Probe

Choose from our wide selection of pH and ORP electrodes at pages 6 and 50.



Innovative Design

Compact-size ergonomic design with electrode holder that can hold multiple electrodes & probes.



Ordering Information

- Mi150** is supplied complete with:
- **MA917B/1** Double junction refillable pH electrode
 - **MA831R** Temperature Probe
 - **MA9315** Electrode Holder
 - **M10004** pH 4.01 Sachet Buffer Solution
 - **M10007** pH 7.01 Sachet Buffer Solution
 - **M10010** pH 10.01 Sachet Buffer Solution
 - **M10016** Sachet Electrode Cleaning Solution
 - **MA9310** 12 VDC Adapter
 - Graduate Pipet
 - Instruction manual

pH/ORP/Temperature Laboratory Bench Meter



This high performance economy microprocessor-based pH/ORP/Temp Bench meter is an ideal tool in schools, laboratories and production plants. It is provided with a series of new diagnostic features which add an entirely new dimension to the measurement of pH, by allowing the user to dramatically improve the reliability of the measurement:

- Automatic Temperature Compensation (ATC) for good accuracy under fluctuating temperatures;
- Hold Function freezes reading for easy viewing;
- Easy to read large custom LCD;
- Stability Indicator prompts whenever reading stabilizes;
- 7 memorized buffers (pH 1.68, 4.01, 6.86, 7.01, 9.18, 10.01 and 12.45) for calibration;
- Messages on the LCD to make the calibration easy and accurate;
- User-selectable "calibration time out" to remind when a new calibration is necessary

Mi151 can also measure with ORP electrodes, thanks to its capability to measure mV with a resolution up to 0.1 mV. For accurate measurements, use the electrode holder supplied with the meter.

Specifications	Mi151
Range	pH -2.00 to 16.00 pH mV ± 699.9 mV / ± 1999 mV Temp -20.0 to 120.0°C / -4.0 to 248.0°F
Resolution	pH 0.01 pH mV 0.1 mV / 1 mV Temp 0.1°C / 0.1°F
Accuracy (@20°C)	pH ± 0.01 pH mV ± 0.2 mV / 1 mV Temp ± 0.4 °C / ± 0.8 °F
Typical EMC Deviation	pH ± 0.02 pH mV ± 0.2 mV / 1 mV Temp ± 0.4 °C / ± 0.8 °F
pH Automatic Calibration	1 or 2 point calibration with 7 memorized buffers
Offset Calibration	± 1 pH
Slope Calibration	from 80 to 108%
Temperature Compensation	automatic from -20.0 to 120.0°C / -4.0 to 248.0°F or manual, without temperature probe
pH Electrode	MA917B/1 (included)
Temperature Probe	MA831R (included)
Environment	0 to 50°C / 32 to 122°F; max RH 95%
Input Impedance	10^{12} Ohm
Power Supply	12 VDC power adapter (included)
Dimensions	230 x 160 x 95 mm
Weight	0.9 kg




Glass Electrode & Temperature Probe

Choose from our wide selection of pH and ORP electrodes at pages 6 and 50.

Custom dual level LCD

Large and easy-to-read Custom dual level LCD Display with simultaneous readings and with user-friendly icons.



Accessories

MA9001	pH 1.68 buffer solution, 230 mL bottle
MA9004	pH 4.01 buffer solution, 230 mL bottle
MA9006	pH 6.86 buffer solution, 230 mL bottle
MA9007	pH 7.01 buffer solution, 230 mL bottle
MA9009	pH 9.18 buffer solution, 230 mL bottle
MA9010	pH 10.01 buffer solution, 230 mL bottle
MA9012	Refilling solution for double junction electrode, 230 mL bottle
MA9015	Electrode storage solution, 230 mL
MA9016	Electrode cleaning solution, 230 mL
MA831R	Temperature probe



MA9112	pH 12.45 buffer solution, 230 mL bottle
MA9310	12 VDC Adapter, 220 V
MA9311	12 VDC Adapter, 110 V
MA9315	Electrode Holder
MA917B/1	Glass body, double junction refillable pH electrode
MA924B/1	± 2000 mV Glass ORP electrode, refillable with BNC connector and 1 meter cable
SE300	Platinum ORP electrode with 1 m cable

Ordering Information

Mi151 is supplied complete with:

- MA917B/1 Double junction refillable pH electrode
- MA831R Temperature Probe
- MA9315 Electrode Holder
- M10004 pH 4.01 Sachet Buffer Solution
- M10007 pH 7.01 Sachet Buffer Solution
- M10010 pH 10.01 Sachet Buffer Solution
- M10016 Sachet Electrode Cleaning Solution
- MA9310 12 VDC Adapter
- Graduate Pipet
- Instruction manual

Mi160

pH/ORP/ISE/Temperature Laboratory Bench Meter

This new pH/ORP/ISE/Temp bench meter is ideal for very accurate and precise measurements for all laboratory needs. It can perform ion-selective measurements directly in ppm, as well as pH, ORP and temperature measurements. pH calibration can also be performed in 3 points selectable between 7 memorized buffers, to provide a very accurate calibration curve even when testing different samples, where very wide differences in pH can be found.

Thanks to the memory it can store up to 50 data sets for each range that can be downloaded to a PC via RS232 or USB. These instruments also have GLP features so, at any time, the user can recall the calibration data.


- 7 memorized buffers (pH 1.68, 4.01, 6.86, 7.01, 9.18, 10.01 and 12.45) for pH calibration
- pH calibration up to 3 points
- ISE calibration up to 2 points; six standard solutions available: 0.01, 0.1, 1, 10, 100, 1000 ppm
- Messages on the LCD to make the calibration easy and accurate
- Relative mV feature
- GLP feature, to view last calibration data for pH or ISE



Specifications	Mi160
Range	pH -2.00 to 16.00 pH mV ± 699.9 mV / ± 2000 mV ISE 0.001 to 19999 ppm Temp -20.0 to 120.0°C / -4.0 to 248.0°F
Resolution	pH 0.01 pH mV 0.1 mV / 1 mV ISE 0.001 (0.001 to 9.999) ppm; 0.01 (10.00 to 99.99) ppm; 0.1 (100.0 to 999.9) ppm; 1 (1000 to 19999) ppm Temp 0.1°C / 0.1°F
Accuracy	pH ± 0.01 pH mV ± 0.2 mV / ± 1 mV ISE $\pm 0.5\%$ Full Scale Temp $\pm 0.4^\circ\text{C}$ / $\pm 0.8^\circ\text{F}$
Rel mV offset	± 2000 mV
pH Calibration	1, 2 or 3 point calibration with 7 memorized buffers
ISE Calibration	1 or 2 point calibration, 6 standard solutions available
Temperature compensation	automatic from -20.0 to 120.0°C / -4.0 to 248.0°F or manual without temperature probe
pH Electrode	MA917B/1 (included)
Temperature Probe	MA831R (included)
Logging	up to 50 records, LOG on demand or auto-logging
Environment	0 to 50°C / 32 to 122°F; max RH 95%
Input Impedance	10^{12} Ohm
Power Supply	12 VDC power adapter (included)
Dimensions	230 x 160 x 95 mm
Weight	1.1 kg

Easy PC Compatibility

RS232 or USB communication interface allows readings to be downloaded to a serial port.



Rear Connector Panel layout

Communication to the PC is done via opto-isolated USB and RS232 ports.



Accessories

- MA9004 pH 4.01 buffer solution, 230 mL bottle
- MA9007 pH 7.01 buffer solution, 230 mL bottle
- MA9010 pH 10.01 buffer solution, 230 mL bottle
- MA9015 Electrode storage solution, 230 mL
- MA9016 Electrode cleaning solution, 230 mL
- MA9112 pH 12.45 buffer solution, 230 mL bottle
- MA831R Temperature probe
- MA9310 12 VDC Adapter, 220 V
- MA9311 12 VDC Adapter, 110 V
- MA9315 Electrode Holder

- MA917B/1 Glass body, double junction refillable pH electrode
- MA924B/1 ± 2000 mV Glass ORP electrode, refillable with BNC connector and 1 meter cable
- SE300 Platinum ORP electrode with 1 m cable
- MA9350 RS232 connection cable with 2 m cable
- Mi5200 Application Software

Ordering Information


- Mi160 is supplied complete with:
- MA917B/1 Double junction refillable pH electrode
 - MA831R Temperature Probe
 - MA9315 Electrode Holder
 - M10004 pH 4.01 Sachet Buffer Solution
 - M10007 pH 7.01 Sachet Buffer Solution
 - M10010 pH 10.01 Sachet Buffer Solution
 - M10016 Sachet Electrode Cleaning Solution
 - Mi5200 Application Software
 - MA9350 RS232 connection cable with 2 meters cable
 - MA9310 12 VDC Adapter
 - Graduate Pipet & Instruction manual

pH electrodes are constructed from a special composition glass which senses the hydrogen ion concentration. This glass is typically composed of alkali metal ions. The alkali metal ions of the glass and the hydrogen ions in solution undergo an ion exchange reaction, generating a potential difference. In a combination pH electrode, the most widely used variety, there are actually two electrodes in one body. One portion is called the measuring electrode, the other the reference electrode. The potential generated at the junction site of the measuring portion is due to the free hydrogen ions present in solution.

The potential of the reference portion is produced by the internal element in contact with the reference fill solution. This potential is always constant. In summary, the measuring electrode delivers a varying voltage and the reference electrode delivers a constant voltage to the meter. The voltage signal produced by the pH electrode is a very small, high impedance signal. The input impedance requires to be interfaced only with equipment with high impedance circuits.

Milwaukee has a wide assortment of pH and ORP electrodes to meet all your specific requirements. Finding the right electrode for a specific application is a very important task and in order to solve this selection problem it is important to consider the following:

- **Glass body electrode versus Epoxy (plastic) body electrode:** Glass body electrodes stand higher temperatures (typically 100°C against 80°C for plastic) and are more resistant to corrosive chemicals and solvents. They are easier to clean and are available in different shapes depending on the application. On the other hand plastic body electrodes are more rugged and the glass bulb is better protected.
- **Gel filled electrodes versus refillable electrodes:** refillable electrodes last longer since electrolyte can be changed for repeated usage. The response is faster due to a greater outflow of electrolyte into the sample and therefore less likely to clog. Gel filled electrodes require less maintenance and resist to higher pressure.
- **Double reference junction versus Single junction reference:** Double junction reference electrodes have a longer life and protects the sample measured from silver contamination from the electrolyte. The Silver wire is more protected and therefore gets less contaminated. The single junction electrodes normally cost less and are ideal for general purpose applications
- **Conic shaped versus Sphere shaped:** The conic-shaped electrode is easier to clean and to maintain (ideal for applications such as dairy). Has a more rugged tip and therefore ideal for penetration. The sphere-shaped has a faster response time due to the larger surface area on the bulb.

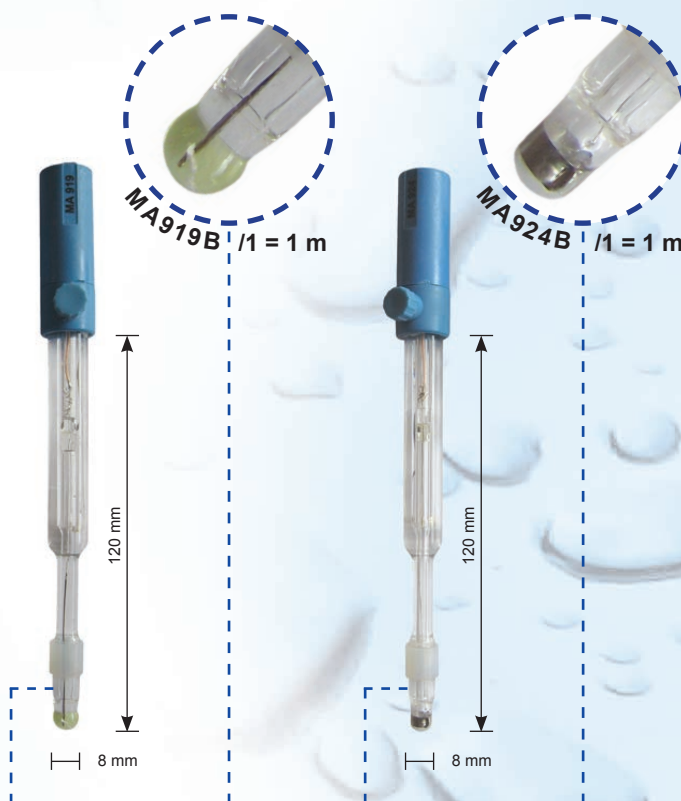

Model	MA919B/1	MA924B/1
Measuring Range	0 to 13 pH	±2000 mV
Temperature Range	-5 to 40 °C (23 to 104°F)	20 to 40 °C (68 to 104°F)
Shaft material	glass	glass
Reference Electrolyte	KCL 3.5M	KCL 3.5M
Reference Junction	open	open
Reference Type	double Ag/AgCl	double Ag/AgCl
Shape of membrane	spheric	Platinum ring
Max. Pressure	0,1 bar	0,1 bar
Connector type	BNC	BNC
Cable length	coaxial 1 meter	coaxial 1 meter
Shaft length	120 mm	120 mm
Diameter	8 mm	8 mm
Application	food laboratory	food laboratory

pH Electrode basics

The pH electrode, due to the nature of its construction, needs to be kept moist at all times. In order to operate properly, glass needs to be hydrated. Hydration is required for the ion exchange process to occur. If an electrode should become dry, it is best to place it in some tap water for half an hour to condition the glass.


pH electrodes are like batteries; they run down with time and use. As an electrode ages, its glass changes resistance. This resistance change alters the electrode potential. For this reason, electrodes need to be calibrated on a regular basis. Calibration in pH buffer solution corrects for this change. Calibration of any pH equipment should always begin with buffer 7.0 as this is the "zero point." The pH scale has an equivalent mV scale. The mV scale ranges from +420 to -420 mV. At a pH of 7.0 the mV value is 0. Each pH change corresponds to a change of approx. ± 60 mV. As pH values become more acidic the mV values become greater.

pH electrodes have junctions which allow the internal electrolyte solution of the measuring electrode to leak out into the solution being measured.

Glass Conic Tip Sensor

Glass Spheric Sensor

Epoxy Electrode

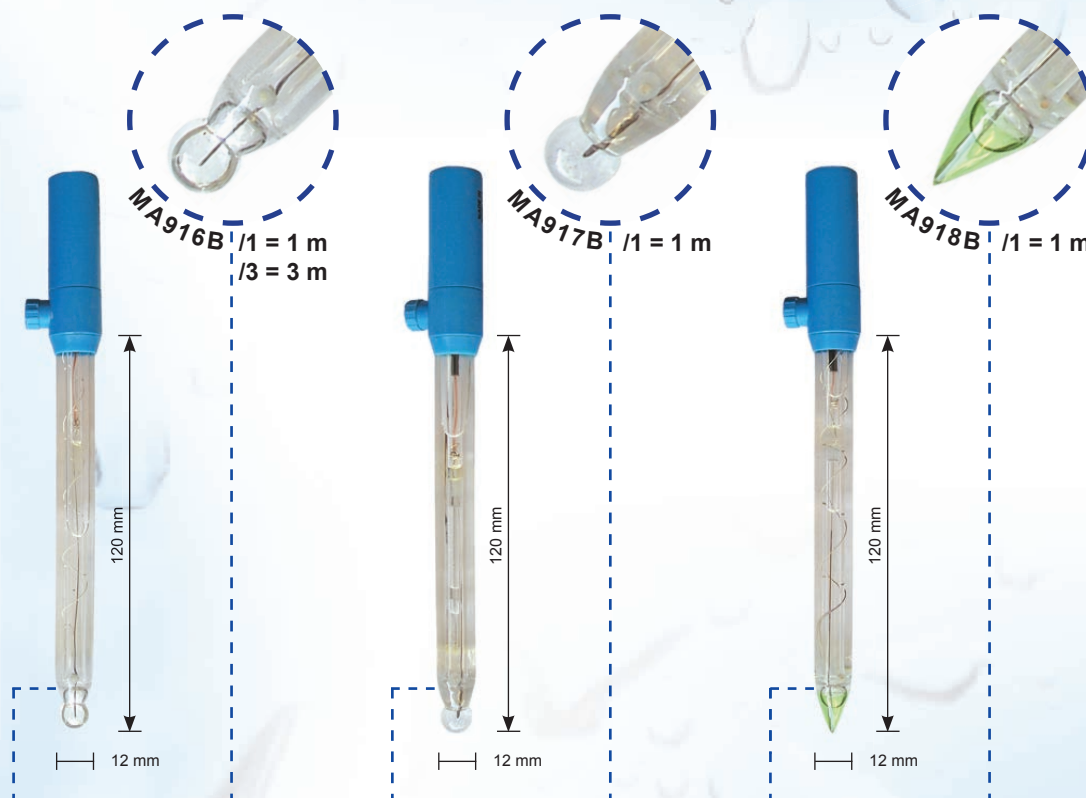


Model	MA916B/1 - MA916B/3	MA917B/1	MA918B/1
Measuring Range	0 to 13 pH	0 to 14 pH	0 to 12 pH
Temperature Range	20 to 40°C (68 to 104°F)	20 to 40°C (68 to 104°F)	-5 to 30°C (23 to 86°F)
Shaft Material	glass	glass	glass
Reference Electrolyte	KCl 3.5M + AgCl	KCl 3.5M	KCl 3.5M + AgCl
Reference Junction	ceramic, single	ceramic, single	ceramic, triple
Reference Type	single, Ag/AgCl	double, Ag/AgCl	single, Ag/AgCl
Shape of membrane	spheric	spheric	conic
Max pressure	0.1 bar	0.1 bar	0.1 bar
Connector Type	BNC	BNC	BNC
Cable length	coaxial, 1 or 3 m	coaxial, 1 m	coaxial, 1 m
Shaft length	120 mm	120 mm	120 mm
Diameter	12 mm	12 mm	12 mm
Application	laboratory applications	laboratory applications	laboratory applications

CE



**Double Junction
Electrode**

**Single Junction
Electrode**

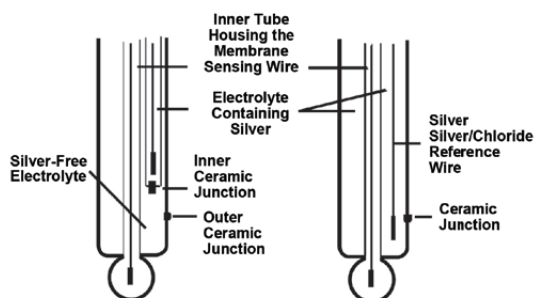

This junction can become clogged by particulates in the solution and can also facilitate poisoning by metal ions present in the solution. If a clogged junction is suspected it is best to soak the electrode in tap water to dissolve the material and clear the junction. When not in use it is best to store the electrode in either buffer 4.0 or buffer 7.0. Never store an electrode in distilled or deionized water as this will cause migration of the electrolyte solution from the electrode.

How long a pH electrode will last will depend on how it is cared for and the solutions it is used to measure. Typically, a gel-filled combination pH electrode will last six months to 1 year depending on the care and application. How long an electrode will last is determined by how well the probe is maintained and the pH application. The harsher the system, the shorter the lifespan. For this reason it is always a good idea to have a back-up electrode on hand to avoid any system down time. Calibration is also an important part of electrode maintenance. This assures not only that the electrode is behaving properly but that the system is operating correctly.

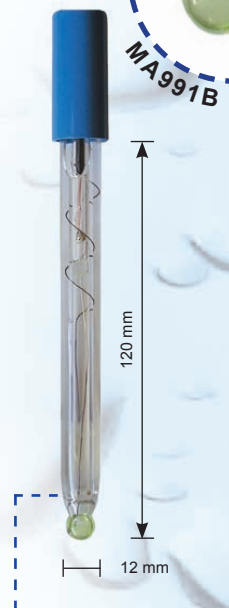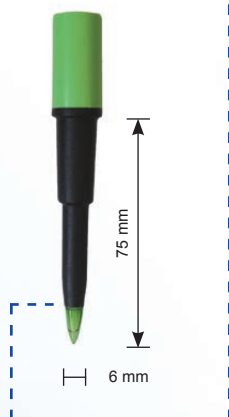

Model	MA915B/2	MA920B/1	MA991B/1
Measuring Range	0 to 13 pH	0 to 12 pH	0 to 13 pH
Temperature Range	-5 to 40°C (23 to 104°F)	-5 to 40°C (23 to 104°F)	-5 to 40°C (23 to 104°F)
Shaft Material	glass	PVDF	glass
Reference Electrolyte	polymer	Viscolene	KCl 3.5M
Reference Junction	ground glass	open	ceramic, single
Reference Type	double, ground glass	single, Ag/AgCl	single, Ag/AgCl
Shape of membrane	spheric	conic	spheric
Max pressure	3 bar	0.1 bar	0.1 bar
Connector Type	BNC	BNC	BNC
Cable length	2 m	coaxial, 1 m	coaxial, 1 m
Shaft length	75 mm	75 mm	120 mm
Diameter	12 mm	6 mm	12 mm
Application	industrial applications	laboratory applications	laboratory applications

pH Electrode


basics

Temperature compensation: When measuring pH using a pH electrode the temperature error from the electrode varies based on the Nernst Equation as 0.03pH/10C/unit of pH away from pH7. The error due to temperature is a function of both temperature and the pH being measured. Temperature compensation can be achieved manually or automatically. Manual temperature compensation is usually achieved by entering the temperature of the fluid being measured into the instruments menu and then the instrument will display a "Temperature Compensated" pH reading.



This means that the temperature is corrected to the value expected at 25 Deg C. Automatic temperature compensation requires input from a temperature sensor and constantly sends a compensated pH signal to the display. Automatic temperature compensation is useful for measuring pH in systems with wide variations in temperature.



DIN Connector

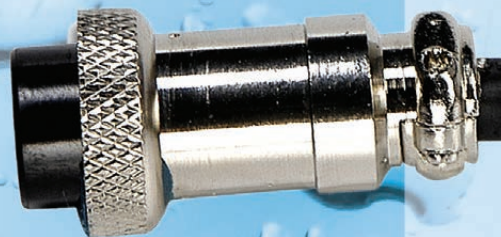

BNC Connector

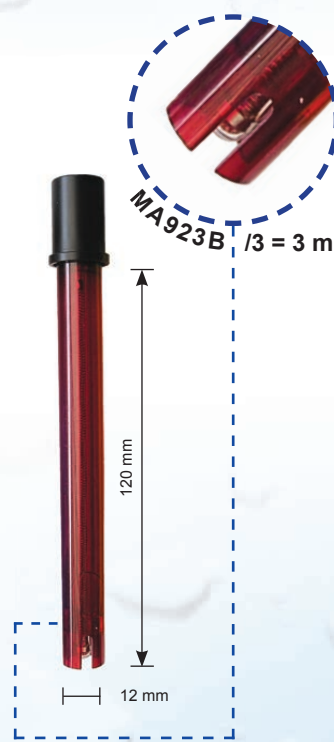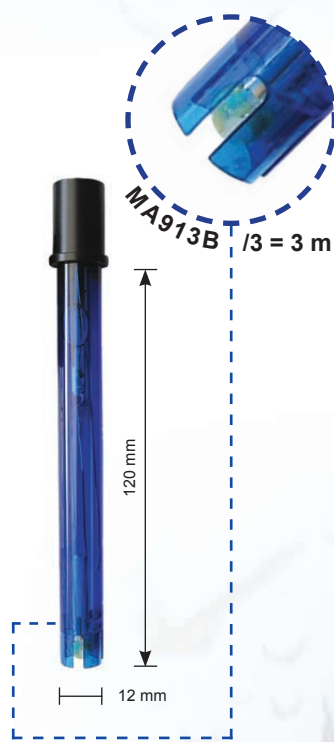

Model	MA905B/3	MA913B/3	MA923B/3
Measuring Range	0 to 13 pH	0 to 13 pH	±1999 mV
Temperature Range	-10 to 80°C (14 to 176°F)	20 to 40°C (68 to 104°F)	20 to 40°C (68 to 104°F)
Shaft Material	polymer	Epoxy	Epoxy
Reference Electrolyte	polymer	gel	gel
Reference Junction	double	ceramic, single	cloth
Reference Type		single, Ag/AgCl	single, Ag/AgCl
Shape of membrane		spheric	spheric pH: conic / ORP: Platinum sensor
Max pressure	6 bar	2 bar	3 bar
Connector Type	3/4" NPT - BNC	BNC	DIN
Cable length	3 m	coaxial, 3 m	7-pole, 3 m
Shaft length	120 mm	120 mm	120 mm
Diameter	22 mm	12 mm	14 mm
Application	industrial applications	water, waste water	water, waste water

Mi105

Portable pH/Temp Meter

- Years warranty
3
- ATC
- Points
2
- Dual Display
- Self diagnostics
- CE



Extended Range pH and Temperature Meter in a compact casing

The included electrode has a built-in temperature sensor and amplifier to prevent electrical interference. The large display shows readings in an extended range from -2.00 to 16.00 pH and simultaneously shows temperature from -5.0 to 105.0°C or 23 to 221°F.

The **Mi105** has a stability indicator and hold feature that freezes the display for easy and accurate recording. The large display also has graphic symbols to guide you through all operations. The battery life of the meters guarantees over 500 hours of continuous use.

When switched ON it performs a self-check and displays the percentage of the remaining battery level to assure proper working condition. Calibration is performed automatically at 1 or 2 points using standard or NIST buffers.



Specifications	Mi105
Range (*)	pH -2.00 to 16.00 pH Temp -5.0 to 105.0°C / 23.0 to 221.0°F
Resolution	pH 0.01 pH Temp 0.1°C / 0.1°F
Accuracy (@25°C)	pH ±0.02 pH Temp ±0.5°C up to 60°C; ±1°C outside / ±1°F up to 140°F; ±2°F outside
Typical EMC Deviation	pH ±0.02 pH Temp ±0.2°C / ±0.4°F
Temperature Compensation	automatic, from -5 to 80°C
pH Calibration	automatic, 1 or 2 points
Probe	MA914BR/1, amplified pH/Temperature probe (included)
Environment	0 to 50°C / 32 to 122°F; max RH 100%
Battery Type	1 x 9V alkaline (included)
Battery Life	approx. 500 hours of use
Auto-off	after 8 minutes of non-use
Dimensions	200 x 85 x 50 mm
Weight	260 g (with battery)

(*) The temperature range is limited to 80°C (176°F) if using the MA914BR/1 probe.

Calibration, Maintenance & Cleaning Solutions

Choose from our wide selection of calibration, maintenance and cleaning solutions at page 52.



Accessories

- MA914BR/1** Combination amplified pH/Temp probe with BNC & RCA connectors and 1 m cable
- M10000B** Electrode rinse solution, 20 mL (25 pcs)
- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution 20 mL sachet (25 pcs)

- M10010B** pH 10.01 buffer solution, 20 mL sachet (25 pcs)
- MA9004** pH 4.01 buffer solution, 230 mL bottle
- MA9006** pH 6.86 buffer solution, 230 mL bottle
- MA9007** pH 7.01 buffer solution, 230 mL bottle
- MA9009** pH 9.18 buffer solution, 230 mL bottle
- MA9010** pH 10.01 buffer solution, 230 mL bottle
- MA9015** Electrode storage solution, 230 mL
- MA9016** Electrode cleaning solution, 230 mL



Ordering Information

Mi105 is supplied complete with MA914BR/1 pH/Temp amplified probe with 1 meter cable, 20 mL pH 4.01 and 7.01 sachet of calibration solution, 2x20 mL sachet of electrode cleaning solutions, 9V battery and instructions, all in a rugged carrying case.

Mi106

Portable pH/ORP/Temp Meter

Extended Range pH/ORP/Temperature Meter

The **Mi106** multi parameter portable meter is ideal for field measurements.

The included combined pH/ORP electrode has a built-in temperature sensor and amplifier to prevent electrical interference.

The large display shows readings in an extended range from -2.00 to 16.00 pH or ± 2000 mV and simultaneously shows temperature from -5.0 to 105.0°C or 23 to 221°F.

The **Mi106** has a stability indicator and hold feature that freezes the display for easy and accurate recording.

The large display also has graphic symbols to guide you through all operations.

When switched ON it performs a self-check and displays the percentage of the remaining battery level to assure proper working condition.

Calibration is performed automatically at 1 or 2 points using standard or NIST buffers.



Years
warranty
3

ATC

Points
2

Dual
Display

Self
diagnostics

CE

Specifications		Mi106
Range (*)	pH	-2.00 to 16.00 pH
	mV	-2000 to +2000 mV
	Temp	-5.0 to 105.0°C / 23.0 to 221.0°F
Resolution	pH	0.01 pH
	mV	1 mV
	Temp	0.1°C / 0.1°F
Accuracy (@25°C)	pH	±0.02 pH
	mV	±2 mV
	Temp	±0.5°C up to 60°C; ±1°C outside / ±1°F up to 140°F; ±2°F outside
Typical EMC Deviation	pH	±0.02 pH
	mV	±2 mV
	Temp	±0.2°C / ±0.4°C
Temperature Compensation		automatic, from -5 to 80°C / 23 to 176°F
pH Calibration		automatic, 1 or 2 points
ORP Calibration		factory calibrated
Probe		MA923D/1, amplified pH/ORP/temperature probe (included)
Environment		0 to 50°C / 32 to 122°F; max RH 95%
Battery Type		1 x 9V alkaline (included)
Battery Life		approx. 500 hours of use
Auto-off		after 8 minutes of non-use
Dimensions		200 x 85 x 50 mm
Weight		260 g (with battery)

(*) The temperature range is limited to 80°C (176°F) if using the MA923D/1 probe.

Hard Carrying Case

Each meter is supplied in a hard carrying case ideal for field measurements.



Accessories

- MA923D/1** Combination amplified pH/ORP/Temp probe with DIN connector and 1 m cable
- M10000B** Electrode rinse solution, 20 mL sachet (25 pcs)
- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution 20 mL sachet (25 pcs)

- M10010B** pH 10.01 buffer solution 20 mL sachet (25 pcs)
- MA9004** pH 4.01 buffer solution, 230 mL bottle
- MA9007** pH 7.01 buffer solution, 230 mL bottle
- MA9015** Electrode storage solution, 230 mL
- MA9016** Electrode cleaning solution, 230 mL

Ordering Information

Mi106 is supplied complete with MA923D/1 pH/ORP/Temp amplified probe with 1 meter cable, 20 mL pH 4.01 and 7.01 sachet of calibration solution, 2x20 mL sachet of electrode cleaning solutions, 9V battery, instructions, all in a rugged carrying case.

MW100/MW101/MW102/MW500

Entry level, inexpensive pH/ORP/Temperature Portable Meters for fast and reliable results







MW100, MW101, MW102 and MW500 are compact pH, ORP and Temperature Portable Meters with Faster Micro Processor. These handy and ergonomically designed portable meters are ideal for anyone working on a low bud-get and still requires fast and reliable measurements.

These portable meters are suitable for a wide range of applications, such as Educational, Agriculture and Horticulture, as well as water and environmental analysis. These easier and faster to calibrate portable meters have a smaller, ergonomic and lighter case design. Other features include 100% larger and easier to read LCD Display and long battery life.

All meters are supplied with pH or ORP electrodes and calibration solutions.

- **MW100** performs pH measurements with a 0.1 pH resolution and with manual temperature compensation.
- **MW101** performs pH measurements with a 0.01 pH resolution and with manual temperature compensation.
- **MW102** is a microprocessor based pH/Temperature meter with extended range (-2.00 to 16.00 pH), Automatic Temperature Compensation, automatic calibration in 2 points and ± 0.02 pH accuracy.
- **MW500** performs ORP measurements with a range of ± 1000 mV.

Specifications		 MW100 pH Meter	 MW101 pH Meter	 MW102 pH/Temp Meter	 MW500 ORP Meter
Range	pH/ORP Temp.	0.0 to 14.0 pH	0.00 to 14.00 pH	-2.00 to 16.00 pH -5 to 70°C	± 1000 mV
Resolution	pH/ORP Temp.	0.1 pH	0.01 pH	0.01 pH 0.1°C	1 mV
Accuracy (@25°C)	pH/ORP Temp.	± 0.2 pH	± 0.02 pH	± 0.02 pH $\pm 0.5^\circ\text{C}$	± 5 mV
Typical EMC Deviation	pH Temp.			± 0.02 pH $\pm 0.5^\circ\text{C}$	
Temperature Compensation		N.A.	manual, 0 to 50°C	automatic, 0 to 70°C	
Calibration		manual, 2-point through offset and slope trimmers	manual, 2-point through offset and slope trimmers	automatic at 1 or 2 points	
pH Electrode		SE220 (included)	SE220 (included)	SE220 (included)	SE300 (included)
ORP Electrode				MA830R (included)	
Temperature Probe				MA830R (included)	
Environment		0 to 50°C, max RH 95%	0 to 50°C, max RH 95%	0 to 50°C, max RH 95%	0 to 50°C, max RH 95%
Battery Type		1 x 9V alkaline (included)	1 x 9V alkaline (included)	1 x 9V alkaline (included)	1 x 9V alkaline (included)
Battery Life		approx. 300 hours of use	approx. 300 hours of use	approx. 300 hours of use after 8 minutes of non-use	approx. 300 hours of use
Auto-off					
Dimensions		145 x 80 x 40 mm	145 x 80 x 40 mm	145 x 80 x 40 mm	145 x 80 x 40 mm
Weight		220 g (with battery)	220 g (with battery)	220 g (with battery)	220 g (with battery)

Accessories

- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
M10007B pH 7.01 buffer solution 20 mL sachet (25 pcs)
M10010B pH 10.01 buffer solution 20 mL sachet (25 pcs)
MA9004 pH 4.01 buffer solution, 230 mL bottle
MA9007 pH 7.01 buffer solution, 230 mL bottle

- MA9015** Electrode storage solution, 230 mL
MA9016 Electrode cleaning solution, 230 mL
MA830R Temperature probe
MA9020 200-275 mV ORP solution, 230 mL bottle
SE220 pH electrode with BNC connector and 1 m cable
SE300 Platinum ORP electrode with 1 m cable



Ordering Information

MW100 and MW101 are supplied complete with a SE220 pH electrode, pH 7.01 20 mL sachet of calibration solution, calibration screwdriver, 9V battery and instructions.
MW102 is supplied complete with a SE220 pH electrode, MA830R stainless steel temperature probe, pH 4.01 and pH 7.01 20 mL sachet of calibration solution, 9V battery and instructions.
MW500 is supplied complete with a SE300 platinum electrode, 9V battery and instructions.

Measuring pH in soil

Using MW101 pH Portable Meter with a MA918B/1 pH Electrode

pH is a measure of the activity of the hydrogen ion (H^+) in the soil solution. If the concentration of H^+ is high, the medium is said to be acid. If it is low, it is said to be alkaline. Most agricultural soils are found between the range of 4 to 10 (when measured in water).

For practical purposes, soil is neutral when pH is between 6 to 8, depending on plant requirements, and it is acidic when pH is less than 6 and alkaline when it is greater than 8.



1. Collect samples of soil.
Take samples from a homogeneous area per 1000m². In smaller places it is also suggested to take at least two samples (the more samples, the more accurate the measurement will be).
Don't take samples from soil where are obvious disorders.

Amount of sample:


Use the same amount of soil for every sample (for example: use identical size sachets)



Spot of sample:

General: take the top 5 cm of the ground
Annuals: from 20-40 cm deep
Fruits: from 20-60 cm deep

Spread the soil on a paper and let it dry out in a shaded place, or put it into a 40°C oven.



2. Shred the dry soil and mix the samples.
You will get a homogeneous sample.
It mustn't contain rocks or organic residues.
Take a sample from this mixture for the measurement.




3. Sift the soil through a 2 mm sifter.

4. Weigh out 1 unit soil (100 g is recommended) and put 2 unit (200 g, 2 dl) destillated water to it.

5. Stir it for 30 seconds.
Wait about five minutes.

6. Stir it again then measure the pH of the solution.



Measuring pH in cheese

Using MW101 pH portable meter
with a MA920B/1 pH electrode



The quality of cheese flavor and texture is the result of well-kept pH and temperature. pH makes sure quality standards have been met; in doing so, they are guaranteeing the safety of the cheese production. Most cheeses range from 5.1 to 5.9 in pH. However, this range will have exceptions to certain types of cheeses such as Camembert cheese which has a pH of 7.4.

During the cheese making process, the pH is measured multiple times. Each type of cheese may have a slightly different process and pH level. It is important for manufacturers and companies to be aware of the differences and treat each cheese variety with the quality and care it deserves. Measuring the pH of cheese essentially gives the manufacturer control of the cheese process.

Cheese making process:

For optimal measurement
put a sample into a beaker



1. Addition of the starter culture
(temperature should stay below 20°C)
pH level (rennet-induced): 5.1 - 5.3
pH level (acid-induced): 4.



2. Coagulation (temperature 30°C)
Usually the pH level stay between: 5.35 – 5.45
In certain cases it can be as low as pH 4.



3. Pressing (room temperature:
16-18°C for mild cheeses and 25°C
for hard cheeses
pH will decrease (pH 5.0 – 5.3)



4. Brining in salt solution
(temperature of solution: 15°C)
optimal pH level: 5.2
(except soft cheeses like Roquefort where
the pH level should be kept at pH 4.7)

During ripening pH level will increase till the optimal ready value.
See the table below

Optimal pH values of ready cheeses	
American, mild	4.98
Camembert	7.44
Cheddar	5.90
Cottage	4.75 - 5.02
Cream, Philadelphia	4.10 - 4.79
Dip	5.80
Edem	5.40
Old English	6.15
Roquefort	5.10 - 5.98
Parmesan	5.20 - 5.30
Snippy	5.18 - 5.21
Stilton	5.70
Swiss Gruyere	5.68 - 6.62

pH55/pH56

Pocket-size pH/Temperature Meters with replaceable electrode

Waterproof pH testers with Large dual-level LCD that displays pH and temperature (°C or °F).

The large display shows readings in an extended range from -2.0 to 16.0 pH (pH56 has a 0.01 pH resolution) and simultaneously shows temperature from -5.0 to 105.0°C or 23.0 to 221.0°F.

They have a stability indicator and hold function that freezes the display for easy and accurate recording.

The large display also has graphic symbols to guide you through all operations.

Complete with a temperature probe for faster and more precise temperature measurement they compensate automatically for temperature.

Calibration is made automatically in 1 or 2 points with memorized standard and NIST buffer sets. Auto power OFF saves battery power after non-use.

The double-junction electrode can be replaced in a very fast and simple way! The modular design allows easy electrode and battery replacement.



Specifications		pH55	pH56
Range	pH	-2.0 to 16.0 pH	-2.00 to 16.00 pH
	Temp.	-5.0 to 60.0°C / 23.0 to 140.0°F	-5.0 to 60.0°C / 23.0 to 140.0°F
Resolution	pH	0.1 pH	0.01 pH
	Temp.	0.1°C / 0.1°F	0.1°C / 0.1°F
Accuracy	pH	±0.1 pH	±0.05 pH
(@25°C)	Temp.	±0.5°C / ±1°F	±0.5°C / ±1°F
Typical EMC	pH	±0.1 pH	±0.02 pH
Deviation	Temp.	±0.3°C / ±0.6°F	±0.3°C / ±0.6°F
Calibration		automatic, 1 or 2 points with 2 sets of memorized buffers (pH 4.01, 7.01, 10.01 or 4.0, 6.86, 9.18)	automatic, 1 or 2 points with 2 sets of memorized buffers (pH 4.01, 7.01, 10.01 or 4.0, 6.86, 9.18)
Temperature Compensation		automatic from -5 to 60°C	automatic from -5 to 60°C
Probe		Mi56P (replaceable)	Mi56P (replaceable)
Environment		-5 to 50°C / 32 to 122°F; max RH 100%	-5 to 50°C / 32 to 122°F; max RH 100%
Battery Type		4 x 1.5V; IEC LR44, A76 (included)	4 x 1.5V; IEC LR44, A76 (included)
Battery Life		approx. 300 hours of use	approx. 300 hours of use
Auto-off		after 8 minutes of non-use	after 8 minutes of non-use
Dimensions		200 x dia 38 mm	200 x dia 38 mm
Weight		100 g	100 g

Temperature Sensor

The pH55 and pH56's exposed temperature sensor provides fast response time, and its proximity to the pH electrode guarantees much more accurate temperature compensated readings.



Replaceable electrode

Replace the electrode in a fast and simple way yourself! Just unscrew the plastic ring on the top of the electrode and replace the electrode with a new one.



Accessories

- Mi56P** Replaceable electrode for pH55 & pH56
- M10000B** Electrode rinse solution, 20 mL sachet (25 pcs)
- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution 20 mL sachet (25 pcs)

- M10010B** pH 10.01 buffer solution 20 mL sachet (25 pcs)
- MA9004** pH 4.01 buffer, 230 mL bottle
- MA9007** pH 7.01 buffer solution, 230 mL bottle
- MA9010** pH 10.01 buffer solution, 230 mL bottle
- MA9015** Electrode storage solution, 230 mL
- MA9016** Electrode cleaning solution, 230 mL

Ordering Information

pH55 is supplied complete with protective cap, 20 mL pH 4.01 and pH 7.01 sachets of calibration solution, carton box, batteries and instructions.

pH56 is supplied complete with protective cap, 20 mL pH 4.01 and pH 7.01 sachets of calibration solution, carton box, batteries and instructions.

ORP57/pH58

Pocket-size pH/ORP/Temperature Meters with replaceable electrode

- Years warranty 2
- ATC
- IP65
- Points 2
- AUTO Buffer
- Dual Display
- Self diagnostics
- CE
- Electrode Replaceable



Combination waterproof testers with advanced functions also include the new model **pH58** for simultaneous pH and ORP measurements and temperature, which is continuously displayed on the dual level LCD.

It shows readings in an extended range from -2.00 to 16.00 pH or ± 1000 mV and simultaneously shows temperature from -5.0 to 105.0°C or 23 to 221°F.

The **pH58** has a stability indicator and hold feature that freezes the display for easy and accurate recording.

The large display also has graphic symbols to guide you through all operations.

Calibration is performed automatically at 1 or 2 points using standard or NIST buffers.

The modular design allows easy electrode and battery replacement.



Specifications	ORP57	pH58
Range	pH ORP Temp. ± 1000 mV -5.0 to 60.0°C / 23.0 to 140.0°F	-2.00 to 16.00 pH ± 1000 mV -5.0 to 60.0°C / 23.0 to 140.0°F
Resolution	pH ORP Temp. 1 mV 0.1°C / 0.1°F	0.01 pH 1 mV 0.1°C / 0.1°F
Accuracy (@25°C)	pH ORP Temp. ± 2 mV $\pm 0.5^\circ\text{C}$ / $\pm 1^\circ\text{F}$	± 0.05 pH ± 2 mV $\pm 0.5^\circ\text{C}$ / 1°F
Typical EMC Deviation	pH ORP Temp. ± 2 mV $\pm 0.3^\circ\text{C}$ / $\pm 0.6^\circ\text{F}$	± 0.02 pH ± 2 mV $\pm 0.3^\circ\text{C}$ / $\pm 0.6^\circ\text{F}$
pH Calibration		automatic for pH, 1 or 2 points from -5 to 60°C with 2 sets of memorized buffers (pH 4.01, 7.01, 10.01 or 4.01, 6.86, 9.18)
ORP Calibration	factory calibrated	factory calibrated
Probe	MI57P (replaceable)	MI58P (replaceable)
Environment	0 to 50°C; max RH 100%	-5 to 50°C; max RH 100%
Battery Type	4 x 1.5V; IEC LR44, A76	4 x 1.5V; IEC LR44, A76
Battery Life	approx. 300 hours of use	approx. 250 hours of use
Auto-off	after 8 minutes of non-use	after 8 minutes of non-use
Dimensions	200 x dia 38 mm	200 x dia 38 mm
Weight	100 g	100 g

Replaceable combination pH/ORP electrode for pH58

Replace the electrode in a fast and simple way yourself! Just unscrew the plastic ring on the top of the electrode and replace the electrode with a new one.



Calibrations, Maintenance & Cleaning Solutions

Choose from our wide selection of calibration, maintenance and cleaning solutions at page 52.



Accessories

- MI57P** Replaceable electrode for ORP57
- MI58P** Replaceable electrode for pH58
- M10000B** Electrode rinse solution, 20 mL sachet (25 pcs)
- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution 20 mL sachet (25 pcs)
- M10010B** pH 10.01 buffer solution 20 mL sachet (25 pcs)

- MA9004** pH 4.01 buffer solution, 230 mL bottle
- MA9007** pH 7.01 buffer solution, 230 mL bottle
- MA9010** pH 10.01 buffer solution, 230 mL bottle
- MA9015** Electrode storage solution, 230 mL
- MA9016** Electrode cleaning solution, 230 mL
- MA9020** ORP test solution (200/275 mV), 230 mL bottle



Ordering Information

ORP57 is supplied complete with protective cap, carton box, batteries and instructions.

pH58 is supplied complete with protective cap, 20 mL pH 4.01 and pH 7.01 sachets of calibration solution, carton box, batteries and instructions.

MC110/MC120

pH Monitors

The Smart pH monitor allows you to continuously monitor pH values directly in your reservoir. Features include: user selectable set point, visual LED alarm when values go above the set point and manual calibration.

Each monitor is powered by a 12 VDC adapter and is ideal for applications such as Hydroponic and Aquarium.

The pH monitors are very simple to operate:

1. Hang your monitor above the reservoir;
2. Connect the adapter to the meter and plug in the power supply (make sure that your power supply is in a safe area away from the water);
3. Immerse 2/3 of the electrode in the solution;
4. The probe can now remain there permanently.

The monitors are supplied complete with a MA911B/2 pH electrode. Each monitor comes complete with a 12 VDC adapter and calibration solution.

User selectable Hi/Low Set Point

A visual LED alarms when value goes above or below the set point the user selected.



Specifications

	MC110	MC120
Range	0.0 to 14.0 pH	0.0 to 14.0 pH
Resolution	0.1 pH	0.1 pH
Accuracy (@25°C)	±0.2 pH	±0.2 pH
Calibration	manual, 2 points through trimmers on the meter front panel	manual, 2 points through trimmers on the meter front panel
Set point	3.5 to 7.5 pH	5.5 to 9.5 pH
Alarm	active when measurement is higher or lower than selected set point	active when measurement is higher or lower than selected set point
pH Electrode	MA911B/2 (included)	MA911B/2 (included)
Environment	0 to 50°C / 32 to 122°F; max RH 95%	0 to 50°C / 32 to 122°F; max RH 95%
Power supply	12 VDC power adapter (included)	12 VDC adapter
Dimensions	148,5 x 82,5 x 40 mm	148,5 x 82,5 x 40 mm
Weight	160 g	160 g

Accessories

- M10000B** Electrode rinse solution, 20 mL sachet (25 pcs)
- M10004B** pH 4.01 buffer solution, 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution, 20 mL sachet (25 pcs)
- M10010B** pH 10.01 buffer solution, 20 mL sachet (25 pcs)
- M10016B** Electrode cleaning solution, 20 mL sachet (25 pcs)

- MA9015** Electrode storage solution, 20 mL sachet (25 pcs)
- MA9016** Electrode cleaning solution, 20 mL sachet (25 pcs)
- MA9310** 12 VDC Adapter, 220 V
- MA9311** 12 VDC Adapter, 110 V
- MA911B/2** Double junction, gel filled pH electrode with 2 m cable



Ordering Information

MC110 is supplied complete with MA9310 12VDC adapter, MA911B/2 pH electrode, 20 mL pH 7.01 sachet of calibration solution, calibration screwdriver and instructions.

MC120 is supplied complete with MA9310 12VDC adapter, MA911B/2 pH electrode, 20 mL pH 7.01 sachet of calibration solution, calibration screwdriver and instructions.


pH Controller and Pump

Control the pH of your tank/reservoir **AUTOMATICALLY!**



The **MC122** pH controller and dosing pump (**MP810**) provides fully automated pH control of aqueous solutions in hydroponic systems. It has been specifically designed to control the pH in mixing tanks for fertilization. The small and precise flow of the peristaltic pump allows you to maintain ideal pH values in your tank.

After selecting the desired pH setting from 5.5 to 9.5 pH, the pH controller measures the pH value of the solution and automatically adds pH adjustment (acid or alkaline) to change the liquid's pH to the selected level.

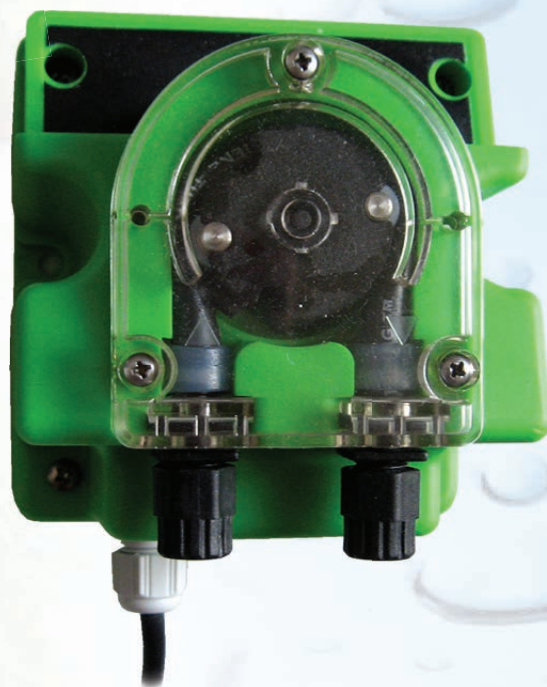

MC720 kit, including MC122 pH Controller and MP810 Dosing Pump



Specifications	MP810	MP810 US
Max. Flow	1.5 L/h	0.6 L
Max. Pressure	2.5 bar	1.5 bar
Squeeze tubing	Santoprene	Santoprene
Ext. Tube connection	6 mm	6 mm
Power supply	240 VAC, 50-60 Hz	110 VAC, 60 Hz
Power consumption	7.7 W	0.42 W
Dimension	100 x 106 x 108 mm	100 x 106 x 108 mm
Weight	600 g	500 g

Ordering Information

MP810 is supplied complete with mounting bracket, screws, 1.5 meter Ext. PE tubing, Filter, Fitting, 2,6 meter Power cable.

MC122 is supplied complete with MA9310 12 VDC adapter, MA911B/2 pH electrode, 20 mL pH4.01 sachet of calibration solution, 20 mL pH7.01 sachet of calibration solution, calibration screwdriver and instructions.

You can also order **MC122** with **MP810** in a kit (**MC720**).

Accessories

- M10000B** Electrode rinse solution 20 mL sachet (25 pcs)
- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution 20 mL sachet (25 pcs)
- M10010B** pH 10.01 buffer solution 20 mL sachet (25 pcs)



- MA9015** Electrode storage solution 20 mL sachet (25 pcs)
- MA9310** 12 VDC Adapter, 220 V
- MA9311** 12 VDC Adapter, 110 V
- MA911B/2** Double junction, gel filled pH electrode with 1 m cable

MC122/MC510/MC125

pH & ORP Controllers

With Milwaukee's MC Controllers you can monitor and control pH and/or ORP levels.

The Milwaukee Instruments MC Controllers have a user selectable set point and a visual "Power Activated" LED notification light. Power to the controller box is turned on when the reading is Above or Below the selected set point. These MC Controllers are ideal for CO₂ or ozone dosing. This could be controlled by a solenoid valve (MA955).

With each Milwaukee Smart controller, your aquarium will have the individual attention that it needs.

Each unit comes with 12 VDC adapter, mounting kit, probe, probe holder and starter calibration solution for pH. (factory calibrated for ORP)

Professional pH controller especially designed for use with aquariums.



MA955 Solenoid valve
for CO₂ dosing



Key features include:

- User selectable Hi/Low Set Point
- Manual 2 points calibration
- Visual LED alarm
- Supplied with 12 VDC adapter and mounting kit
- Power plug for CO₂ dosing
- Double junction pH electrode and/or platinum ORP electrode (BNC connector)

Specifications	MC122	MC510	MC125
Range	0.0 to 14.0 pH	±1000 mV (ORP)	0.00 to 14.00 pH; ±1000 mV (ORP)
Resolution	0.1 pH	1 mV (ORP)	0.1 pH; 1 mV (ORP)
Accuracy (@25°C)	±0.2 pH	±5 mV (ORP)	±0.2 pH; ±5 mV (ORP)
Set point pH	5.5 to 9.5 pH		4 to 8 pH
Set point ORP		0 to 600 mV	-200 to 600 mV
Alarm	active when measurement is higher or lower than selected set point	active when measurement is higher or lower than selected set point	active when measurement is higher or lower than selected set points
Output power socket	relay, 230V / 117V; 8A	relay, 230V / 117V; 8A	relay, 230V / 117V; 8A
Output	active when measurement is higher or lower than selected set point	active when measurement is higher or lower than selected set point	active when measurement is higher or lower than selected set points
pH Electrode	MA911B/2 (included)	MA921B/2 (included)	MA911B/2 (included)
ORP Electrode		MA921B/2 (included)	MA921B/2 (included)
Environment	0 to 50°C / 32 to 122°F; max RH 95%	0 to 50°C / 32 to 122°F; max RH 95%	0 to 50°C / 32 to 122°F; max RH 95%
Power Supply	12 VDC power adapter (included)	12 VDC power adapter (included)	12 VDC power adapter (included)
Power Drivers	115VAC, 2A, 60Hz or 230VAC, 1A, 50Hz	115VAC, 2A, 60Hz or 230VAC, 1A, 50Hz	115VAC, 2A, 60Hz or 230VAC, 1A, 50Hz
Dimensions	148,5 x 82,5 x 32 mm	148,5 x 82,5 x 32 mm	148,5 x 82,5 x 32 mm
Weight	180 g (meter only)	180 g (meter only)	180 g (meter only)

Accessories

- M10000B** Electrode rinse solution 20 mL sachet (25 pcs)
- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution 20 mL sachet (25 pcs)
- M10010B** pH 10.01 buffer solution 20 mL sachet (25 pcs)
- MA9015** Electrode storage solution 20 mL sachet (25 pcs)

- MA9310** 12 VDC Adapter, 220 V
- MA9311** 12 VDC Adapter, 110 V
- MA955** Solenoid valve with 1.5 m cable
- MA911B/2** Double junction, gel filled pH electrode with 1 m cable
- MA921B/2** ORP Electrode with BNC connector and 2 m cable

Ordering Information

MC122 is supplied complete with MA9310 12 VDC adapter, MA911B/2 pH electrode, 20 mL pH4.01 sachet of calibration solution, 20 mL pH7.01 sachet of calibration solution, calibration screwdriver and instructions.

MC510 is supplied complete with MA9310 12 VDC adapter, MA921B/2 ORP electrode and instructions.

MC125 is supplied complete with MA9310 12 VDC adapter, power plug socket for ozone dosing, MA911B/2 pH electrode, MA921B/2 ORP electrode, 20 mL pH7.01 sachet of calibration solution, calibration screwdriver and instructions.

Autoranging EC/TDS/NaCl/Temperature Laboratory Bench Meter



Mi170 measures 4 different parameters - EC, TDS (Total Dissolved Solids), percentage of NaCl and temperature in a variety of ranges.

The auto-ranging feature for EC and TDS measurements automatically sets the resolution suitable to the tested sample. All measurements can be temperature compensated at 20 or 25°C and the compensation coefficient is selectable by the user.

The automatic temperature compensation can also be disabled for measuring the actual conductivity value. The stability indicator on the LCD ensures accuracy.

Conductivity readings are performed with the 4-ring probe supplied with the meter. The GLP feature allows users to store and recall data on system status.

PC compatible through an RS232 or USB port.

Specifications	Mi170
Range	<p>EC 0.00 to 29.99 µS/cm; 30.0 to 299.9 µS/cm; 300 to 2999 µS/cm; 3.00 to 29.99 mS/cm; 30.0 to 200.0 mS/cm; up to 500.0 mS/cm actual conductivity (uncompensated EC)*</p> <p>TDS 0.00 to 14.99 mg/L (ppm); 15.0 to 149.9 mg/L (ppm); 150 to 1499 mg/L (ppm); 1.5 to 14.99 g/L (ppt); 15.0 to 100.0 g/L (ppt); up to 400.0 g/L actual TDS* (with 0.80 factor)</p> <p>NaCl 0.0 to 400.0%</p> <p>Temp -20.0 to 120.0°C / -4.0 to 248.0°F</p>
Resolution	<p>EC 0.01 µS/cm; 0.1 µS/cm; 1.0 µS/cm; 0.01 mS/cm; 0.1 mS/cm</p> <p>TDS 0.01 mg/L; 0.1 mg/L; 1.0 mg/L; 0.01 g/L; 0.1 g/L</p> <p>NaCl 0.1%</p> <p>Temp 0.1°C / 0.1°F</p>
Accuracy	<p>EC ±1% of reading ±(0.05 µS/cm or 1 digit)</p> <p>TDS ±1% of reading ±(0.03 mg/L or 1 digit)</p> <p>NaCl ±1% of reading</p> <p>Temp ±0.4°C / ±0.8°F</p>
Calibration	<p>EC 1 point slope calibration with 6 memorized solutions (84.0 µS/cm, 1413 µS/cm, 5.00 mS/cm, 12.88 mS/cm, 80.0 mS/cm, 111.8 mS/cm)</p> <p>NaCl 1 point, with MA9066 calibration solution</p> <p>Temp 2 points, 0 to 50°C / 32 to 122°F</p>
Temp. Compensation	automatic or manual, from -20.0 to 120.0°C / -4.0 to 248.0°F
Temp. Coefficient	selectable from 0.00 to 6.00%/°C (EC and TDS only)
Probe	MA814DB/1 4-ring probe with built-in temperature sensor (included)
TDS Factor	0.40 to 0.80 (default value is 0.50)
Logging	up to 50 records, LOG on demand or auto-logging
GLP	last EC, NaCl calibration data
PC Interface	RS232 / USB Opto-isolated
Environment	0 to 50°C / 32 to 122°F; max RH 95%
Power supply	12 VDC power adapter (included)
Dimensions	230 x 160 x 95 mm
Weight	0.9 kg

(*) Uncompensated conductivity (or TDS) is the conductivity (or TDS) value without temperature compensation.

Accessories

MA814DB/1	EC/Temperature probe with DIN connector and 1 m cable
MA9060	12880 µS/cm calibration solution, 230 mL bottle
MA9061	1413 µS/cm calibration solution, 230 mL bottle
MA9063	84 µS/cm calibration solution, 230 mL bottle
MA9064	80000 µS/cm conductivity solution, 230 mL bottle

MA9065	111.8 mS/cm calibration solution, 230 mL bottle
MA9066	100% NaCl calibration solution, 230 mL bottle
MA9069	5000 µS/cm solution, 230 mL bottle
MA9310	12 VDC Adapter, 220 V
MA9311	12 VDC Adapter, 110 V
MA9315	Electrode holder
MA9350	RS232 connection cable with 2 meters cable
Mi5200	Application Software

More accurate readings with the 4-RING MA814DB/1 EC/TDS/NaCl and Temperature probe!

Conductivity readings are performed by applying an alternate current to the 4-ring probe which creates a variable voltage depending on the conductivity.



Rear Connector Panel layout

Communication to the PC is done via opto-isolated USB and RS232 ports.



Ordering Information

Mi170 is supplied complete with

- **MA814DB/1** EC/TDS/NaCl/Temperature Probe
- **MA9315** Electrode Holder
- **M10030** 12880 µS/cm calibration solution
- **M10031** 1413 µS/cm calibration solution
- **Mi5200** Application Software
- **MA9350** RS232 connection cable with 2 meters cable
- **MA9310** 12 VDC Adapter
- Instruction manual

Mi306

Automatic & Logging EC/TDS/NaCl/Temperature Meter

Mi306 is a waterproof portable logging microprocessor-based Conductivity/TDS/NaCl/Temperature meter.


The autoranging feature of the EC and TDS ranges automatically sets the meter to the scale with the highest possible resolution.

The Auto Endpoint (HOLD) feature automatically freezes the display when a stable reading is reached. The measurements are automatically (ATC) or manually (MTC) compensated for temperature.

The temperature coefficient value is user selectable. It is possible to disable the temperature compensation and measure the actual conductivity (NoTC).

The Battery Error Preventing System (BEPS) switches the meter off when the batteries are too weak to support proper function. The meter can store measurements in memory by logging function for retrieval at a later time upon user request.

Mi306 also allows data transfer to computer through the RS232 port. Double LCD displays, for simultaneous readings of the specific conductivity and temperature.



Specifications	Mi306
Range (Autoranging) EC	0.00 to 29.99 µS/cm; 30.0 to 299.9 µS/cm; 300 to 2999 µS/cm; 3.00 to 29.99 mS/cm; 30.0 to 200.0 mS/cm; up to 500.0 mS/cm actual (*) EC
(Autoranging) TDS	0.00 to 14.99 mg/L; 15.0 to 149.9 mg/L; 150 to 1499 mg/L; 1.50 to 14.99 g/L; 15.0 to 100.0 g/L; up to 400.0 g/L actual (*) TDS (with 0.80 factor)
NaCl	0.0 to 400.0%
Temp	0.0 to 60.0°C
Resolution	EC 0.01 µS/cm (from 0.00 to 29.99 µS/cm); 0.1 µS/cm (from 30.0 to 299.9 µS/cm); 1 µS/cm (from 300 to 2999 µS/cm); 0.01 mS/cm (from 3.00 to 29.99 mS/cm); 0.1 mS/cm (over 30.0 mS/cm) TDS 0.01 mg/L (from 0.00 to 14.99 mg/L); 0.1 mg/L (from 15.0 to 149.9 mg/L); 1 mg/L (from 150 to 1499 mg/L); 0.01 g/L (from 1.50 to 14.99 g/L); 0.1 g/L (over 15.0 g/L) NaCl 0.1% Temp 0.1°C
Accuracy	EC ±1% of reading (±0.05 µS/cm or 1 digit whichever greater) TDS ±1% of reading (±0.053 ppm or 1 digit whichever greater) NaCl ±1% of reading Temp ±0.4°C
Typical EMC Deviation	EC ±1% of reading TDS ±1% of reading NaCl ±1% of reading Temp ±0.1°C
Logging	up to 250 records, LOG on demand
Communication	with PC through RS232 port
EC Calibration	1 point with 7 memorized buffers: 0 µS/cm; 84 µS/cm, 1413 µS/cm, 5000 µS/cm, 12880 µS/cm, 80000 µS/cm; 111800 µS/cm
NaCl Calibration	1 point with MA9066 buffer (optional)
Temperature Compensation	automatic or manual from 0 to 60°C (can be disabled to measure actual conductivity and TDS)
Temperature Coefficient	0.00 to 6.00%/°C (for EC and TDS only) Default value is 1.90%/°C
TDS Factor	0.40 to 0.80 (default value is 0.50) reference temperature: 20 or 25°C
Probe	MA814D/1 EC probe with built-in temperature sensor & 1 m cable (included)
Auto-off	after 5 minutes of non use (can be disabled)
Battery type / Battery life	1 x 9V battery (included) / approx. 100 hours of use
Casing	IP 67
Environment	0 to 50°C; max RH 100%
Dimensions	200 x 85 x 50 mm
Weight	280 g

(*) Uncompensated conductivity (orTDS) is the conductivity (or TDS) value without temperature compensation.

Accessories



- MA814D/1** 4-ring EC probe with DIN connector and 1 m cable
- M10030B** 12880 µS/cm calibration solution, 20 mL sachet, 25 pcs.
- M10031B** 1413 µS/cm calibration solution, 20 mL sachet, 25 pcs.
- M10035B** 111.8 mS/cm calibration solution, 20 mL sachet, 25 pcs.
- MA9060** 12880 µS/cm calibration solution, 230 mL bottle
- MA9061** 1413 µS/cm calibration solution, 230 mL bottle
- MA9063** 84 µS/cm calibration solution, 230 mL bottle
- MA9065** 111.8 mS/cm calibration solution, 230 mL bottle
- MA9066** 100% NaCl calibration solution, 230 mL bottle
- MA9069** 5000 µS/cm solution, 230 mL bottle
- MA9351** RS232 connection cable (5 to 9 pin) with 2 meters cable (for Mi306)
- Mi5200** Application Software

Ordering Information

Mi306 is supplied in a hard carrying case complete with

- **MA814D/1** EC/TDS/NaCl/Temp probe with DIN connector and 1 meter cable
- **MA9060** 12880 µS/cm calibration solution
- **Mi5200** Application Software
- **MA9351** RS232 connection cable with 2 meters cable
- Instruction manual

MW301/MW302/MW401/MW402

Entry level, inexpensive Conductivity & TDS
Portable Meters for fast and reliable results



MW301, MW302, MW401 and MW402 are compact Conductivity and TDS Portable Meters with Faster Micro Processor. These handy and ergonomically designed portable meters are ideal for anyone working on a low budget and still requires fast and reliable measurements. These portable meters are suitable for a wide range of applications, such as Educational, Agriculture and Horticulture, as well as water and environmental analysis.

These portable meters with Automatic Temperature Compensation have a smaller, ergonomic and lighter case design. Other features include 100% larger and easier to read LCD Display and long battery life.

Each meter is supplied complete with Conductivity/TDS probe with 1 meter cable and calibration solution.

Choose your portable EC & TDS meter according to the proper EC/TDS ranges for your application:

- **MW301:** 0 to 1990 $\mu\text{S/cm}$ with a 1 $\mu\text{S/cm}$ resolution;
- **MW302:** 0.0 to 10.0 mS/cm with a 0.1 mS/cm resolution;
- **MW401:** 0 to 1990 mg/L (ppm) with a 1 mg/L resolution;
- **MW402:** 0.0 to 10.0 g/L (ppt) with a 0.1 g/L resolution.

Specifications	MW301	MW302	MW401	MW402
Range	0 to 1990 $\mu\text{S/cm}$	0.0 to 10.0 mS/cm	0 to 1990 mg/L (ppm)	0.0 to 10.0 g/L (ppt)
Resolution	1 $\mu\text{S/cm}$	0.1 mS/cm	1 mg/L (ppm)	0.1 g/L (ppt)
Accuracy (@25°C)	$\pm 2\%$ Full Scale	$\pm 2\%$ Full Scale	$\pm 2\%$ Full Scale	$\pm 2\%$ Full Scale
Conversion factor			0.5	0.5
Calibration Solutions (included)	1413 $\mu\text{S/cm}$ (M10031B)	5.00 mS/cm (M10039B)	1382 mg/L (M10032B)	6.44 g/L (M10038B)
Conductivity probe	SE510 (included)	SE520 (included)	SE510 (included)	SE520 (included)
Temperature Compensation	automatic, from 5 to 50°C	automatic, from 5 to 50°C	automatic, from 5 to 50°C	automatic, from 5 to 50°C
Environment	0 to 50°C, max RH 95%	0 to 50°C, max RH 95%	0 to 50°C, max RH 95%	0 to 50°C, max RH 95%
Battery Type	1 x 9V alkaline (included)	1 x 9V alkaline (included)	1 x 9V alkaline (included)	1 x 9V alkaline (included)
Battery Life	approx. 300 hours of use	approx. 300 hours of use	approx. 300 hours of use	approx. 300 hours of use
Dimensions	145 x 80 x 40 mm	145 x 80 x 40 mm	145 x 80 x 40 mm	145 x 80 x 40 mm
Weight	220 g (with battery)	220 g (with battery)	220 g (with battery)	220 g (with battery)

Accessories

- SE510** EC/TDS probe with DIN connector and 1 m cable for MW301, MW401
- SE520** EC/TDS probe with DIN connector and 1 m cable for MW302, MW402
- M10031B** 1413 $\mu\text{S/cm}$ calibration solution, 20 mL (25 pcs)
- M10032B** 1382 ppm (mg/L) calibration solution, 20 mL (25 pcs)

- M10038B** 6.44 ppt (g/L) calibration solution, 20 mL (25 pcs)
- MA9060** 12880 $\mu\text{S/cm}$ calibration solution, 230 mL bottle
- MA9061** 1413 $\mu\text{S/cm}$ calibration solution, 230 mL bottle
- MA9062** 1382 ppm TDS solution, 230 mL bottle



Ordering Information

MW301 is supplied complete with SE510 EC probe, 20 mL 1413 $\mu\text{S/cm}$ sachet of calibration solution, screwdriver for calibration, 9V battery and instructions.

MW302 is supplied complete with SE520 EC probe, 20 mL 1413 $\mu\text{S/cm}$ sachet of calibration solution, screwdriver for calibration, 9V battery and instructions.

MW401 is supplied complete with SE510 EC probe, 20 mL 1382 ppm sachet of calibration solution, screwdriver for calibration, 9V battery and instructions.

MW402 is supplied complete with SE520 EC probe, 20 mL 6.44 ppt sachet of calibration solution, screwdriver for calibration, 9V battery and instructions.


EC59/EC60

Pocket-size EC/TDS/Temp Meters

These new waterproof Pocket-size EC/TDS/Temp Meters include features such as a replaceable probe, temperature in °C or °F, automatic temperature compensation with adjustable β battery level indicator, stability indicator, automatic shut-off and automatic calibration all in a floating, waterproof casing.

EC59 shows on the dual-level LCD the EC (3999 $\mu\text{S}/\text{cm}$) or TDS (2000 ppm) value. It also displays the temperature from 0.0 to 60.0°C (or 32.0 to 140.0°F) on the secondary level at the same time.

EC60 shows on the dual-level LCD the EC (20.00 mS/cm) or TDS (10.00 ppt) value. It also displays the temperature from 0.0 to 60.0°C (or 32.0 to 140.0°F) on the secondary level at the same time.

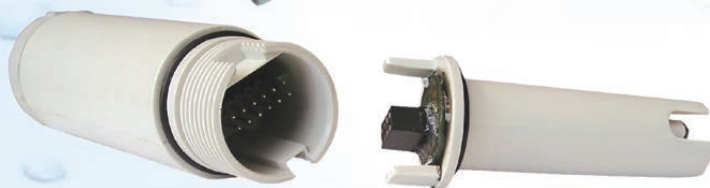

Specifications		EC59	EC60
Range	EC TDS Temp	3999 $\mu\text{S}/\text{cm}$ 2000 ppm 0.0 to 60.0°C / 32.0 to 140.0°F	20.00 mS/cm 10.00 ppt 0.0 to 60.0°C / 32.0 to 140.0°F
Resolution	EC TDS Temp	1 $\mu\text{S}/\text{cm}$ 1 ppm 0.1°C / 0.1°F	0.01 mS/cm 0.01 ppt 0.1°C / 0.1°F
Accuracy (@20°C)	EC TDS Temp	2% Full Scale 2% Full Scale $\pm 0.5^\circ\text{C}$ / $\pm 1^\circ\text{F}$	2% Full Scale 2% Full Scale $\pm 0.5^\circ\text{C}$ / $\pm 1^\circ\text{F}$
Typical EMC Deviation	EC TDS Temp	2% Full Scale 2% Full Scale $\pm 0.5^\circ\text{C}$ / $\pm 1^\circ\text{F}$	2% Full Scale 2% Full Scale $\pm 0.5^\circ\text{C}$ / $\pm 1^\circ\text{F}$
Calibration		automatic, 1 point	automatic, 1 point
Temperature Compensation		automatic, with $\beta=0.0$ to 2.4%/°C	automatic, with $\beta=0.0$ to 2.4%/°C
Probe		Mi59P (replaceable)	Mi59P (replaceable)
Environment		0 to 50°C / 32 to 122°F; max RH 100%	0 to 50°C / 32 to 122°F; max RH 100%
Battery Type		4 x 1.5V; IEC LR44, A76 (included)	4 x 1.5V; IEC LR44, A76 (included)
Battery Life		approx. 100 hours of use after 8 minutes of non-use	approx. 100 hours of use after 8 minutes of non-use
Auto-off			
Dimensions		200 x dia 38 mm	200 x dia 38 mm
Weight		100 g	100 g


Easy to read Display

Dual level LCD displays EC/TDS and temperature.



Replaceable EC/TDS/Temp probe

Exposed temperature sensor



Replaceable EC/TDS probe

Accessories

- Mi59P** Replaceable probe for EC59 & EC60
M10000B Rinse solution, 20 mL sachet, 25 pcs
M10030B 12880 $\mu\text{S}/\text{cm}$ calibration solution, 20 mL sachet, 25 pcs
M10031B 1413 $\mu\text{S}/\text{cm}$ calibration solution, 20 mL sachet, 25 pcs
M10032B 1382 ppm (mg/L) calibration solution, 20 mL sachet, (25 pcs)

- M10038B** 6.44 ppt (g/L) calibration solution, 20 mL sachet, (25 pcs)
MA9060 12880 $\mu\text{S}/\text{cm}$ calibration solution, 230 mL bottle
MA9061 1413 $\mu\text{S}/\text{cm}$ calibration solution, 230 mL bottle
MA9016 Cleaning solution, 230 mL bottle



Ordering Information

EC59 is supplied complete with protective cap, 20 mL 1413 $\mu\text{S}/\text{cm}$ sachet of calibration solution, carton box, batteries and instructions.

EC60 is supplied complete with protective cap, 20 mL 12880 $\mu\text{S}/\text{cm}$ sachet of calibration solution, carton box, batteries and instructions.

MC310

Conductivity Monitor



Reliable Conductivity monitors with Automatic temperature compensation and 1 point manual calibration powered by a 12 VDC adapter.

They are ideal for the hydroponic market and allow you to continuously monitor EC values directly in your reservoir.

Other features include: user selectable set point, visual LED alarm when values go above/below (selectable by the user) the set point.

The monitors are very simple to operate:

1. Hang your monitor above your reservoir
2. Connect the adapter to the meter and plug in the power supply (make sure that your power supply is in a safe area from the water!)
3. Immerse 2/3 of the probe in the solution
4. The probe can now remain there permanently.

Specifications




MC310

Range	EC	0.0 to 10.0 mS/cm
Resolution	EC	0.1 mS/cm
Accuracy (@25°C)		±2% Full Scale
Set point		1 to 5 mS/cm
Alarm		active when the measurement is higher or lower than the set point
Temperature compensation		automatic, from 5 to 50°C
Environment		0 to 50°C; max RH 95%
Probe		MA812/2 (included)
Power supply		12 VDC power adapter (included)
Dimensions		148,5 x 82,5 x 32 mm
Weight		180 g (meter only)

User selectable Hi/Low Set Point

A visual LED alarms when value goes above or below the set point the user selected.

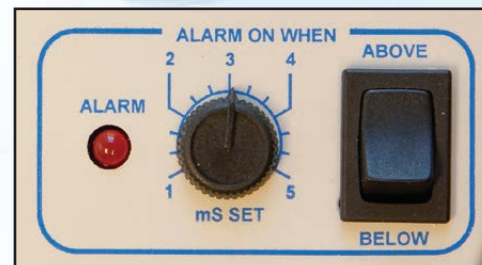

Accessories

M10000B	Electrode rinse solution, 20 mL sachet (25 pcs)	MA9062	1382 ppm TDS solution, 230 mL bottle
M10031B	1413 µS/cm calibration solution, 20 mL sachet (25 pcs)	MA9310	12 VDC Adapter, 220 V
M10032B	1382 ppm calibration solution, 20 mL sachet (25 pcs)	MA9311	12 VDC Adapter, 110 V
MA9061	1413 µS/cm calibration solution, 230 mL bottle	MA812/2	Conductivity probe with 2 m cable



Ordering Information

MC310 is supplied complete with MA9310 12VDC adapter, MA812/2 EC probe, 20 mL 1413 µS/cm sachet of calibration solution, screwdriver for calibration and instruction.

MC410

TDS Monitor

Reliable TDS monitors with Automatic temperature compensation and 1 point manual calibration powered by a 12 VDC adapter.

They are ideal for the hydroponic market and allow you to continuously monitor TDS values directly in your reservoir.

Other features include: user selectable set point, visual LED alarm when values go above/below (selectable by the user) the set point.

The monitors are very simple to operate:

1. Hang your monitor above your reservoir
2. Connect the adapter to the meter and plug in the power supply (make sure that your power supply is in a safe area from the water!)
3. Immerse 2/3 of the probe in the solution
4. The probe can now remain there permanently.



Specifications

MC410

Range	EC/TDS	0 to 1990 ppm
Resolution	EC/TDS	10 ppm
Accuracy (@25°C)		±2% Full Scale
Conversion factor		0.7
Set point		100 to 1900 ppm
Alarm		active when the measurement is higher or lower than the set point
Temperature compensation		automatic, from 5 to 50°C
Environment		0 to 50°C; max RH 95%
Probe		MA812/2 (included)
Power supply		12 VDC adapter
Dimensions		148,5 x 82,5 x 32 mm
Weight		180 g (meter only)

User selectable Hi/Low Set Point

On the MC410 a visual LED alarms when value goes above or below the set point the user selected.



Accessories

M10000B	Electrode rinse solution, 20 mL sachet (25 pcs)	MA9062	1382 ppm TDS solution, 230 mL bottle
M10031B	1413 µS/cm calibration solution, 20 mL sachet (25 pcs)	MA9310	12 VDC Adapter, 220 V
M10032B	1382 ppm calibration solution, 20 mL sachet (25 pcs)	MA9311	12 VDC Adapter, 110 V
MA9061	1413 µS/cm calibration solution, 230 mL bottle	MA812/2	Conductivity probe with 2 m cable



Ordering Information

MC410 is supplied complete with MA9310 12VDC adapter, MA812/2 TDS probe, 20 mL 1382 ppm sachet of calibration solution, screwdriver for calibration and instruction.

Extended Range Bench Dissolved Oxygen Meter



Ideal for testing Dissolved Oxygen in the pharmaceutical and food Industry, as well as monitoring in water treatment plants. The user can choose to measure D.O. readings in mg/L or % of saturation of O₂.

This meter can be used for any type of water, as it allows measurements to compensate for temperature, altitude and salinity factors. The automatic logging interval can be set to perform analysis and store data into the memory.

All logged data can be downloaded to your PC through an RS232 or USB serial port. Memory can store up to 50 samples. **Mi190** features an automatic calibration procedure, at 1 or 2 points (at 0 and 100% of O₂ saturation). The polarographic probe supplied with the meter (MA840) measures the current generated by the reaction of O₂ with Ag.

Mi190 is supplied complete with MA840 DO probe with 3 m cable, 2 spare membranes, MA7041 electrolyte solution (30 mL), 12 VDC power adapter, probe holder and instruction manual.



Polarographic D.O. Probe

Polarographic D.O. probe with 3 meters cable



Rear Connector Panel layout

Communication to the PC is done via opto-isolated USB and RS232 ports.



Ordering Information

Mi190 is supplied complete with:

- **MA840** DO probe with 3 meter cable
- **MA841** Spare membrane (2 pcs)
- **MA9071** Electrolyte solution
- **MA9315** Electrode Holder
- **Mi5200** Application Software
- **MA9350** RS232 connection cable with 2 meters cable
- **MA9310** 12 VDC Adapter
- Instruction manual

Specifications	Mi190
Range	O ₂ 0.00 to 45.00 mg/L (ppm) % Saturation O ₂ 0.0 to 300% Temp -5.0 to 55.0°C / 23.0 to 131.0°F
Resolution	O ₂ 0.01 mg/L (ppm) % Saturation O ₂ 0.1% Temp 0.1°C / 0.1°F
Accuracy	O ₂ ±1.5 Full Scale % Saturation O ₂ ±1.5 Full Scale Temp ±0.4°C / ±0.8°F
DO Calibration	automatic, 1 or 2 point at 0% (MA9070) and 100% (in air)
Temperature compensation	0.0 to 50.0°C / 32.0 to 122.0°F
Altitude compensation	0 to 4000 m; resolution 100 m
Salinity compensation	0 to 40 g/L; resolution 1 g/L
DO probe	MA840 with DIN connector (included)
Temperature Probe	Included in DO probe
Calibration	2 points (0.0°C and 50.0°C / 32.0 to 122.0°F)
Logging	up to 50 records, LOG on demand or auto-logging
PC interface	RS232 / USB Opto-isolated
Power Supply	12 VDC power adapter (included)
Environment	0 to 50°C / 32 to 122°F; max RH 100%
Dimensions	230 x 160 x 95 mm
Weight	0.9 Kg

Accessories

MA9070 Zero Oxygen Solution, 230 mL bottle
MA9071 Refilling Electrolyte Solution, 230 mL bottle
MA9310 12 VDC Adapter, 220 V
MA9311 12 VDC Adapter, 110 V
MA9315 Electrode Holder



MA841 Spare membrane (5 pcs)
MA840 DO probe with 3 meters cable
MA9350 RS232 connection cable with 2 m cable
Mi5200 Application Software

Mi605

Portable D.O. Meter for Field Applications

Mi605 is a portable, microprocessor-based, Dissolved Oxygen meter with automatic calibration and temperature compensation (ATC) specifically designed for spot sampling applications.


Dissolved Oxygen measurements can be displayed in parts per million (ppm=mg/L) or in % of saturation.

The temperature is indicated in Celsius from 0 to 50°C with 0.1 resolution. The meter compensates salinity and altitude automatically after manual input.

Calibration is very simple and fast: just expose the polarographic Dissolved Oxygen probe MA840, supplied with the instrument, to air and press the CAL button. No need for chemical solutions!

A HOLD button allows the user to freeze the reading on the LCD.

The low battery indicator and the easy to replace screw on cap membranes make the Mi605 a compact instrument and ideal for all applications: aquaculture, wastewater, environmental and educational.

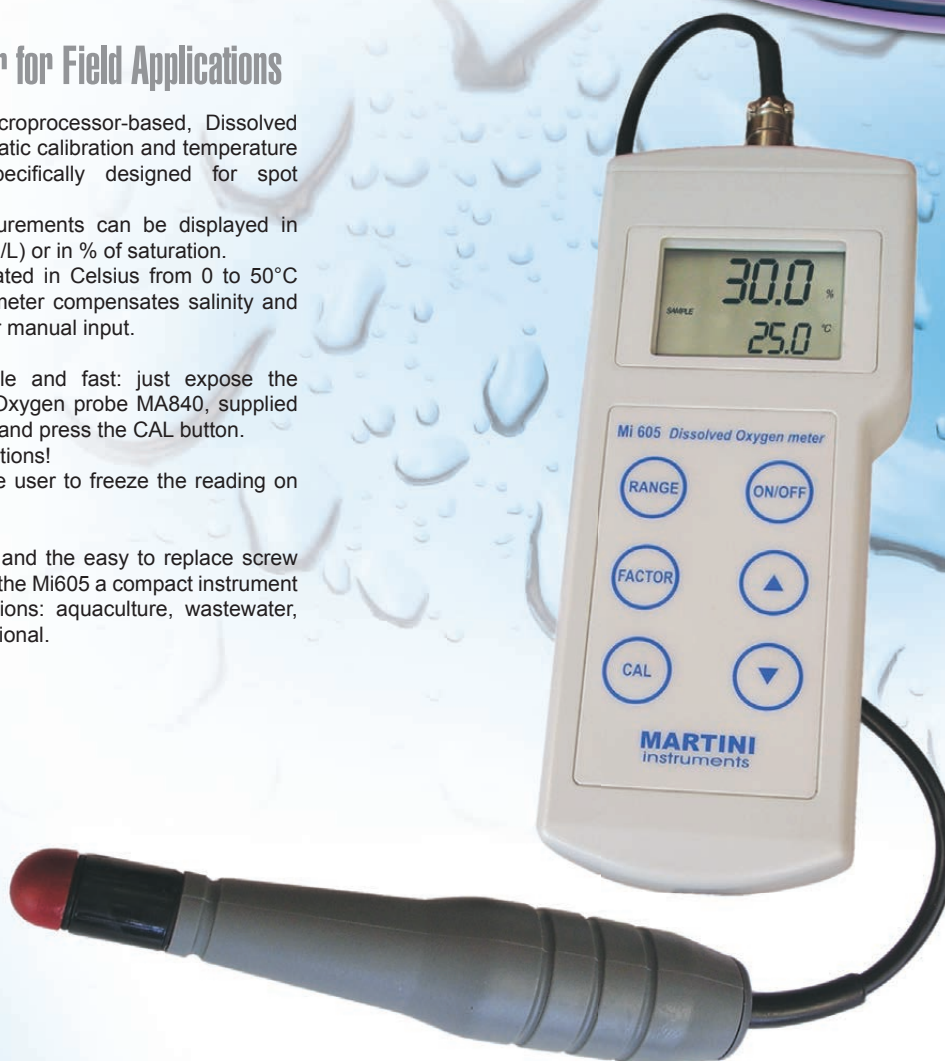

Specifications	Mi605
Range	O ₂ % Saturation O ₂ Temp
	0.0 to 45.00 mg/L (ppm) 0.0 to 300% 0.0 to 50.0°C / 32 to 122°F
Resolution	O ₂ % Saturation O ₂ Temp
	0.01 mg/L (ppm) 0.1% 0.1°C
Accuracy	O ₂ % Saturation O ₂ Temp
	±1.5% Full Scale ±1.5% Full Scale ±0.5°C
Typical EMC Deviation	O ₂ % Saturation O ₂ Temp
	±0.3 mg/L (ppm) ±3.5% ±0.5°C
Calibration	automatic in saturated air
Temperature Compensation	automatic, from 0 to 50°C / 32 to 122°F
Altitude Compensation	0 to 4000 m; 100 m resolution
Salinity Compensation	0 to 80 g/L; 1 g/L resolution
Probe	MA840 (included)
Environment	0 to 50°C / 32 to 122°F; max RH 100%
Battery Type	1 x 9V alkaline (included)
Battery Life	approx. 100 hours of use
Auto-off	after 4 hours of non-use
Dimensions	200 x 85 x 50 mm
Weight	280 g (with battery)

Hard Carrying Case

Mi605 is supplied complete in a hard carrying case complete with a D.O. probe, spare membranes, calibration solutions, battery and instructions.



Accessories

- MA9071** Refilling Electrolyte solution, 230 mL bottle
- MA841** Spare membrane (5 pcs)
- MA840** D.O. Probe



Ordering Information

Mi605 is supplied complete with MA840 polarographic D.O. probe with 3 meters cable, 2 spare membranes, 20 mL bottle of electrolyte solution, rugged carrying case, 9V battery and instructions.

Entry level, inexpensive Dissolved Oxygen Portable Meter for fast and reliable results


The **MW600** is a compact Portable Dissolved Oxygen meter with Faster Micro Processor. This handy and ergonomically designed portable meter is ideal for anyone working on a low budget and still requires fast and reliable measurements. This portable meter measures Dissolved Oxygen with a Polarographic probe and is suitable for a wide range of applications, such as Educational and Aquaculture, as well as water and environmental analysis.

Other features include smaller, ergonomic and lighter case design, 100% larger and easier to read LCD Display, low battery warning, easy to replace screw on cap membranes and long battery life.

Rugged Carrying Case (Optional) provides handy on-site meter calibration and measurements.

MW600 is supplied complete with a MA840 D.O. polarographic probe with 3 m cable, calibration screwdriver, 2 spare membranes, MA9071 (30 mL) electrolyte solution, battery and instructions.

The **MW600** calibrates easily in 2 points (at 100% saturated air and in 0 Oxygen solution) and has Automatic Temperature Compensation which guarantees the highest accuracy.

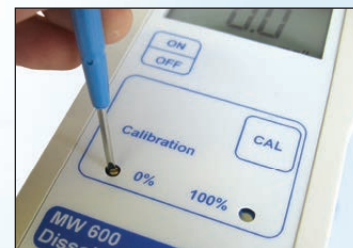

Large and Easy-to-read Display

MW600 offers highly stable and accurate readings with large LCD display.

Specifications	MW600
Range	O ₂ 0.0 to 19.9 mg/L
Resolution	O ₂ 0.1 mg/L
Accuracy (@25°C)	O ₂ ±1.5% Full Scale
Calibration	manual on 2 points (zero and slope)
Temperature Compensation	automatic from 0 to 30°C
Probe	MA840 (included)
Environment	0 to 50°C / 32 to 122°F; max RH 95%
Battery Type	9V alkaline (included)
Battery Life	approximately 70 hours of use
Dimensions	145 x 80 x 40 mm
Weight	220 g (with battery)

ALTITUDE & SALINITY COMPENSATION:

If the sample contains salts or if you are performing the measurements at altitude different from sea level, the readout values must be corrected, taking into account the lower degree of oxygen solubility.

Altitude Compensation: all the readouts are referred to sea level, thus the displayed measurements are higher than the actual values. In fact, altitude affects D.O. concentration by decreasing its value.

The table on the left reports the oxygen solubility at various temperatures and altitudes, based on sea level barometric pressure of 760 mmHg.

This gives an idea of the error that can be introduced at different altitudes and allows to calculate the quantity to be subtracted to correct the reading.

Altitude, Meters above Sea Level									
°C	0 m	300 m	600 m	900 m	1200 m	1500 m	1800 m	°F	
0	14.6	14.1	13.6	13.2	12.7	12.3	11.8	32.0	
2	13.8	13.3	12.9	12.4	12.0	11.6	11.2	35.6	
4	13.1	12.7	12.2	11.9	11.4	11.0	10.6	39.2	
6	12.4	12.0	11.6	11.2	10.8	10.4	10.1	42.8	
8	11.8	11.4	11.0	10.6	10.3	9.9	9.6	46.4	
10	11.3	10.9	10.5	10.2	9.8	9.5	9.2	50.0	
12	10.8	10.4	10.1	9.7	9.4	9.1	8.8	53.6	
14	10.3	9.9	9.6	9.3	9.0	8.7	8.3	57.2	
16	9.9	9.7	9.2	8.9	8.6	8.3	8.0	60.8	
18	9.5	9.2	8.7	8.6	8.3	8.0	7.7	64.4	
20	9.1	8.8	8.5	8.2	7.9	7.7	7.4	68.0	
22	8.7	8.4	8.1	7.8	7.7	7.3	7.1	71.6	
24	8.4	8.1	7.8	7.5	7.3	7.1	6.8	75.2	
26	8.1	7.8	7.5	7.3	7.0	6.8	6.6	78.8	
28	7.8	7.5	7.3	7.0	6.8	6.6	6.3	82.4	
30	7.5	7.2	7.0	6.8	6.5	6.3	6.1	86.0	
32	7.3	7.1	6.8	6.6	6.4	6.1	5.9	89.6	
34	7.1	6.9	6.6	6.4	6.2	6.0	5.8	93.2	
36	6.8	6.6	6.3	6.1	5.9	5.7	5.5	96.8	
38	6.6	6.4	6.2	5.9	5.7	5.6	5.4	100.4	
40	6.4	6.2	6.0	5.8	5.6	5.4	5.2	104.4	

Accessories

- MA9070** Zero Oxygen calibration solution, 230 mL bottle
MA9071 Refilling Electrolyte solution, 230 mL bottle



- MA840** D.O. Probe
MA841 Spare membrane (5 pcs)

Ordering Information

MW600 is supplied complete with MA840 probe, 2 spare membranes, 20 mL bottle of electrolyte solution, calibration screwdriver, 9V battery and instructions.

Mi180

pH/ORP/EC/TDS/NaCl/Temperature Laboratory Bench Meter


Mi180 measures 6 different parameters: pH, ORP, EC, TDS (Total Dissolved Solids), percentage of NaCl and temperature in a variety of ranges.

pH calibration can be performed in 3 points selectable between 7 memorized buffers, to provide a very accurate calibration curve even when testing different samples, where very wide differences in pH can be found.

The auto-ranging feature for EC and TDS measurements automatically sets the resolution suitable to the tested sample. All measurements can be temperature compensated at 20 or 25°C and the compensation coefficient is selectable by the user.

The automatic temperature compensation can also be disabled for measuring the actual conductivity value. The stability indicator on the LCD ensures accuracy. Conductivity readings are performed with the 4-ring probe supplied with the meter.

The GLP feature allows users to store and recall data on system status.



PC compatible
through an RS232
port or USB.

Years
warranty
3

LOG

MEM

RS232

USB

ATC

GLP

Points
2Dual
Display

MULTI

Software
CDSelf
diagnostics

CE

Specifications		Mi180
Range	pH	-2.00 to 16.00 pH; -2.000 to 16.000 pH
	mV	±699.9 mV; ±2000 mV
	EC	0.00 to 29.99 µS/cm; 30.0 to 299.9 µS/cm; 300 to 2999 µS/cm;
		3.00 to 29.99 mS/cm; 30.0 to 200.0 mS/cm; up to 500.0 mS/cm (uncompensated EC*)
	TDS	0.0 to 14.99 mg/L (ppm); 15.0 to 149.9 mg/L (ppm); 150 to 1499 mg/L (ppm);
		1.50 to 14.99 g/L (ppt); 15.0 to 100.0 g/L (ppt);
		up to 400.0 g/L actual TDS (with 0.80 factor)
	NaCl	0.0 to 400.0%
	Temp	-20.0 to 120.0°C / -4.0 to 248.0°F
Resolution	pH	0.01 pH; 0.001 pH
	mV	0.1 mV; 1 mV
	EC	0.01 µS/cm; 0.1 µS/cm; 1 µS/cm; 0.01 mS/cm; 0.1 mS/cm;
	TDS	0.01 mg/L; 0.1 mg/L; 1.0 mg/L; 0.01 g/L; 0.1 g/L
	NaCl	0.1%
Accuracy	Temp	0.1°C / 0.1°F
	pH	±0.01 pH; ±0.002 pH
	mV	±0.2 mV; ±1 mV
	EC	±1% of reading ±(0.05 µS/cm or 1 digit)
	TDS	±1% of reading ±(0.03 ppm or 1 digit)
	NaCl	±1% reading
	Temp	±0.4°C / ±0.8°F
Rel mV offset		±2000 mV
Calibration	pH	1, 2 or 3 points calibration, with 7 memorized buffers (pH 1.68, 4.01, 6.86, 7.01, 9.18, 10.01 and 12.45)
	EC	1 point slope calibration with 6 memorized solutions: (84 µS/cm, 1413 µS/cm, 5.00 mS/cm, 12.88 µS/cm, 80.0 µS/cm, 111.8 mS/cm)
	NaCl	1 point, with MA9066 solution
	Temp	2 point, at 0 and 50°C / 32 and 122°F
		automatic or manual, from -20.0 to 120.0°C / -4.0 to 248.0°F
Temperature Compensation		selectable from 0.00 to 6.00%/°C (EC and TDS only)
pH Electrode & Temp. Probe		MA917B/1 & MA831R (included)
EC/TDS/NaCl/Temp. Probe		MA814DB/1 (included)
TDS Factor		0.40 to 0.80 (default value is 0.50)
Logging		up to 50 records, LOG on demand or auto-logging
GLP		last pH, EC, NaCl calibration data
PC Interface		RS232 / USB Opto-isolated
Environment		0 to 50°C / 32 and 122°F; max RH 95%
Input impedance		10 ¹² Ohm
Power supply		12 VDC power adapter (included)
Dimensions		230 x 160 x 95 mm
Weight		0.9 kg

(*) Uncompensated conductivity (or TDS) is the conductivity (or TDS) value without temperature compensation.

Ordering Information

Mi180 is supplied complete with

- MA917B/1 pH Electrode
- MA814DB/1 EC/TDS/NaCl/Temperature probe
- MA831R Temperature Probe

- MA9315 Electrode Holder
- M10004 pH 4.01 Sachet Buffer solution
- M10007 pH 7.01 Sachet Buffer solution
- M10010 pH 10.01 Sachet Buffer solution
- M10030 12880 µS/cm calibration solution
- M10031 1413 µS/cm calibration solution

Accessories



- MA9004 pH 4.01 buffer, 230 mL bottle
- MA9007 pH 7.01 buffer, 230 mL bottle
- MA9010 pH 10.01 buffer, 230 mL bottle
- MA9015 Electrode storage solution, 230 mL bottle
- MA9016 Electrode cleaning solution, 230 mL bottle
- MA9112 pH 12.45 buffer solution, 230 mL bottle
- MA9060 12880 µS/cm calibration solution, 230 mL bottle
- MA9061 1413 µS/cm calibration solution, 230 mL bottle
- MA9063 84 µS/cm calibration solution, 230 mL bottle
- MA9065 111.8 mS/cm calibration solution, 230 mL bottle
- MA9066 100% NaCl calibration solution, 230 mL bottle
- MA9069 5000 µS/cm solution, 230 mL bottle
- MA9310 12 VDC Adapter, 220 V
- MA9311 12 VDC Adapter, 110 V
- MA9315 Electrode Holder
- MA917B/1 Double junction refillable pH electrode
- MA814DB/1 EC/TDS/NaCl/Temperature probe with DIN connector and 1 m cable
- MA924B/1 ±2000 mV Glass ORP electrode, refillable with BNC connector and 1 meter cable
- SE300 Platinum ORP electrode with 1 meter cable
- MA831R Temperature probe
- MA9350 RS232 connection cable with 2 meters cable

- M10016 Sachet Electrode Cleaning solution
- Mi5200 Application Software
- MA9350 RS232 connection cable (2 meters)
- MA9310 12 VDC Adapter
- Graduate Pipet & Instruction manual

Mi805/Mi806

Portable pH/EC/TDS/Temperature Meters

Measures 4 parameters with 1 single probe.

Mi805 and **Mi806** offer you a combination of pH, Conductivity, total dissolved solids and temperature measurements.

You can select from a range of calibration buffers and also the temperature scale (°C or °F) can be selected.



The multi-parameter probe MA851D/1, includes pH/EC/TDS and temperature, all in one rugged handle.

Other features include different TDS factors from 0.45 to 1.00, and a range of temperature coefficients (β) from 0.0 to 2.4% for greater consistency and reproducibility.

The Stability Indicator prompts the user when the reading stabilizes.

The Auto-Hold Function automatically freezes reading for later viewing. Large and Easy-to-Read display provides simultaneous readings of pH and Temperature or EC/TDS and temperature.



Specifications			
		Mi805	Mi806
Range	pH EC TDS Temp.	0.00 to 14.00 pH 0 to 3999 µS/cm 0 to 1999 ppm 0.0 to 60.0°C / 32.0 to 140.0°F	0.00 to 14.00 pH 0.00 to 20.00 mS/cm 0.00 to 10.00 ppt 0.0 to 60.0°C / 32.0 to 140.0°F
Resolution	pH EC TDS Temp.	0.01 pH 1 µS/cm 1 ppm 0.1°C / 0.1°F	0.01 pH 0.1 mS/cm 0.01 ppt 0.1°C / 0.1°F
Accuracy (@25°C)	pH EC/TDS Temp.	±0.01 pH ±2% Full Scale ±0.5°C / ±1°F	±0.01 pH ±2% Full Scale ±0.5°C / ±1°F
Typical EMC Deviation	pH EC/TDS Temp.	±0.02 pH ±2% Full Scale ±0.5°C / ±1°F	±0.02 pH ±2% Full Scale ±0.5°C / ±1°F
Temperature Compensation		automatic from 0 to 60°C with β adj. from 0.0 to 2.4%/°C	automatic from 0 to 60°C with β adj. from 0.0 to 2.4%/°C
pH Calibration		automatic, 1 or 2 points with automatic buffer recognition	automatic, 1 or 2 points with automatic buffer recognition
EC Calibration		automatic, 1 point	automatic, 1 point
EC/ TDS Conversion Factor		adj. from 0.45 to 1.00	adj. from 0.45 to 1.00
Probe		MA851D/1 amplified pH/EC/TDS/Temperature probe with DIN connector and 1 m cable (included)	MA851D/1 amplified pH/EC/TDS/Temperature probe with DIN connector and 1 m cable (included)
Environment		0 to 50°C / 32 to 122°F max RH 100%	0 to 50°C / 32 to 122°F max RH 100%
Battery Type		1 x 9V alkaline (included)	1 x 9V alkaline (included)
Battery Life		approx. 300 hours	approx. 300 hours
Auto-off		after 8 minutes of non-use	after 8 minutes of non-use
Dimensions		200 x 85 x 50 mm	200 x 85 x 50 mm
Weight		260 g (with battery)	260 g (with battery)

Accessories



MA851D/1 Amplified pH/EC/TDS/Temperature probe with DIN connector and 1 m cable

MA9004 pH 4.01 buffer solution, 230 mL bottle

MA9006 pH 6.86 buffer solution, 230 mL bottle

MA9007 pH 7.01 buffer solution, 230 mL bottle

MA9009 pH 9.18 buffer solution, 230 mL bottle

MA9010 pH 10.01 buffer solution, 230 mL bottle

MA9015 Probe storage solution, 230 mL

MA9016 General cleaning solution, 230 mL

MA9060 12880 µS/cm solution, 230 mL

MA9061 1413 µS/cm solution, 230 mL

M10000B Rinse solution, 20 mL (25 pcs.)

Ordering Information

Mi805 is supplied complete with MA851D/1 pH/EC/TDS/Temp amplified probe with 1 meter cable, 2x20 mL pH 4.01 and pH 7.01 sachet of calibration solutions, 2x20 mL 1413 µS/cm sachet of calibration solutions, 2x20 mL sachet of electrode cleaning solutions, rugged carrying case, 9V battery and instructions.

Mi806 is supplied complete with MA851D/1 pH/EC/TDS/Temp amplified probe with 1 meter cable, 2x20 mL pH 4.01 and pH 7.01 sachet of calibration solutions, 2x20 mL 12880 µS/cm sachet of calibration solutions, 2x20 mL sachet of electrode cleaning solutions, rugged carrying case, 9V battery and instructions.

MW801/MW802

Entry level, inexpensive pH/EC/TDS Portable Meters for fast and reliable results

MW801 and **MW802** are compact Portable Meters with Faster Micro Processor. These meters allow you to measure pH, EC (conductivity) and TDS with just one instrument and one single probe!

These easier and faster to calibrate portable meters have a smaller, ergonomic and lighter case design. Other features include 100% larger and easier to read LCD Display and long battery life.

Both meters calibrate manually in pH, Conductivity and TDS.

Each meter is supplied with the MA850 interchangeable probe with 1 meter cable to measure pH, Conductivity and TDS. The pH electrode utilizes a fiber junction to reduce contamination when measuring fertilizer solutions.


- The **MW801** with a Conductivity range that goes up to 1990 $\mu\text{S}/\text{cm}$ and TDS range that goes up to 1990 ppm is an ideal tool for drinking water measurements.
- The **MW802**, with a conductivity range that goes up to 6.00 mS/cm and the TDS up to 4000 ppm is ideal for testing in crop production.



Specifications		MW801	MW802
Range	pH	0.0 to 14.0 pH	0.00 to 14.00 pH
	EC	0 to 1990 $\mu\text{S}/\text{cm}$	0.00 to 6.00 mS/cm
	TDS	0 to 1990 ppm	0 to 4000 ppm
Resolution	pH	0.1 pH	0.10 pH
	EC	10 $\mu\text{S}/\text{cm}$	0.1 mS/cm
	TDS	10 ppm	10 ppm
Accuracy (@25°C)	pH	± 0.2 pH	± 0.20 pH
	EC/TDS	$\pm 2\%$ Full Scale	$\pm 2\%$ Full Scale
Calibration Solutions		M10007 (pH 7.01)	M10007 (pH 7.01)
		M10031 (1413 $\mu\text{S}/\text{cm}$)	M10031 (1413 $\mu\text{S}/\text{cm}$)
		M10032 (1382 ppm)	
Conversion Factor		0.5	0.68
Calibration		manual, at 1 point	manual, at 1 point
Temperature Compensation		automatic, from 0 to 50°C	automatic, from 0 to 50°C
Probe		SE600 combination pH/EC/TDS/probe (included)	SE600 combination pH/EC/TDS/probe (included)
Environment		0 to 50°C / 32 to 122°F; max RH 95%	0 to 50°C / 32 to 122°F; max RH 95%
Battery Type		1 x 9V alkaline	1 x 9V alkaline
Battery Life		150 hours of use	150 hours of use
Auto-off		after 8 minutes of non-use	after 8 minutes of non-use
Dimensions		185 x 82 x 45 mm	185 x 82 x 45 mm
Weight		165 g (with battery)	165 g (with battery)

Large and Easy-to-read Display

MW801 and **MW802** offer highly stable and accurate readings with large LCD display.

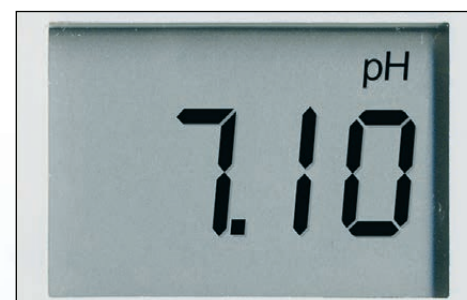

Combined interchangeable pH, Conductivity and TDS Probe

The pH electrode utilizes a fiber junction to reduce contamination when measuring fertilizer solutions.



Accessories

- M10000B** Electrode rinse solution, 20 mL sachet (25 pcs)
- M10004B** pH 4.01 buffer solution, 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution, 20 mL sachet (25 pcs)
- M10010B** pH 10.01 buffer solution, 20 mL sachet (25 pcs)
- M10031B** 1413 $\mu\text{S}/\text{cm}$ calibration solution, 20 mL sachet (25 pcs)

- M10032B** 1382 ppm calibration solution, 20 mL sachet (25 pcs)
- MA9015** Electrode storage solution, 230 mL bottle
- MA9016** Cleaning solution, 230 mL bottle
- SE600** pH/EC/TDS spare probe with 1 meter cable



Ordering Information

MW801 is supplied complete with SE600 combination pH/EC/TDS probe, 20 mL sachet pH 7.01 buffer solution, 20 mL 1413 $\mu\text{S}/\text{cm}$ sachet of calibration solution, 20 mL 1382 ppm sachet of calibration solution, 9V battery and instructions.

MW802 is supplied complete with SE600 combination pH/EC/TDS probe, 20 mL sachet pH 7.01 buffer solution, 20 mL 1413 $\mu\text{S}/\text{cm}$ sachet of calibration solution, 20 mL 1500 ppm sachet of calibration solution, 9V battery and instructions.

Entry level, inexpensive LUX Portable Meters for fast and reliable results

MW700 is a portable Lux meter designed to perform light measurements. **MW700** with Faster Micro Processor, has a smaller, ergonomic and lighter case design. Other features include 100% larger and easier to read LCD Display and long battery life.

These handy and ergonomically designed portable meters are ideal for anyone working on a low budget and still requires fast and reliable measurements. These portable meters are suitable for a wide range of applications, such as Educational, Agriculture and Horticulture, as well as water and environmental analysis.

Both models are supplied with a light sensor connected to the meter that measures from 0 to 50000 Lux.

Average indoor lighting ranges from 100 to 1000 Lux and average outdoor sun lights about 50000 Lux. Lux is a unit that indicates the density of light that falls on a surface.

The light is necessary for the development of the plants. In fact, it is necessary a sufficient contribution of light in order to favor the photosynthesis and the closing of the plants.

The supplement of light by means of lamps electrical workers is the method simpler and economic in order to bring the necessary light to the plants.

The human eye is sensitive only to blue, green, and red light, so in calculating the Lux falling on an object, only the light that the human eye sees is counted. When only infrared light falls on an object, the Lux is counted as zero since our eyes see nothing. Mathematically, a spectral weighting function becomes convolved with the actual illumination spectrum to calculate Lux exactly.

This is the formal definition of Lux and it makes Lux an unusual unit of measure.

Still, Lux can be thought of as a way of measuring light in terms of what our eyes perceive. The metric unit of measure for luminance of a surface. One Lux is equal to one Lumen per square meter. One Lux equals 0.0929 footcandles.



Specifications	MW700
Range	0.000 to 1999 Lux 2000 to 19999 Lux 20000 to 50000 Lux
Range setting	manual through key buttons
Resolution	1 Lux 10 Lux 100 Lux
Accuracy	±6% of reading ±1 digit
Peak wave length	560 nm
Sensor Type	silicon photodiode
Sensor Sensitivity	100 scotopic Lux
Sensor stability	±2% change per year (in the first two years)
Environment	0 to 50°C / 32 to 122°F; max RH 95%
Battery type	1x9V (IEC 6LR61) alkaline
Battery life	approximately 150 hours of continuous use
Auto-off	after about 5 minutes of non-use
Weight	270 g (with sensor)

Light Sensor

MW700 are provided with a light sensor connected to the meter through a coaxial cable.



Range keys

Press one of the three "Range keys" to select the proper scale according to the intensity of the light.

Ordering Information

MW700 is supplied complete with 9V battery and instructions.



Mi411

Free & Total Chlorine and pH Photometer

This latest laboratory grade Microprocessor photometer has an excellent repeatability and is ideal for field measurements.

Chlorine is the most commonly used water disinfectant. Applications vary from treatment of drinking water and wastewater to pool and spa sanitization and food processing to sterilization.

The **Mi411** is a portable microprocessor based instrument to measure three critical parameters to ensure good water quality: pH, free chlorine and total chlorine.

This instrument provides greater resolution, better accuracy and immediate results.

Mi411 is supplied in a hard carrying case including 2 cuvettes, reagents for 100 tests, wiping tissue and instruction manual.

3 in 1 Combination Photometer!



Specifications		Mi411
Range	Free Chlorine Total Chlorine pH	0.00 to 5.00 mg/L Cl ₂ 0.00 to 5.00 mg/L Cl ₂ 6.5 to 8.0 pH
Resolution	Free Chlorine Total Chlorine pH	0.01 mg/L (0.00 to 3.50 mg/L); 0.10 mg/L (above 3.50 mg/L) 0.01 mg/L (0.00 to 3.50 mg/L); 0.10 mg/L (above 3.50 mg/L) 0.1 pH
Accuracy	Free Chlorine Total Chlorine pH	±0.04 mg/L @ 1.50 mg/L ±0.04 mg/L @ 1.50 mg/L ±0.1 pH @ 7.2 pH
Method	Free Chlorine Total Chlorine pH	adaptation of the USEPA method 330.5 and Standard Method 4500-Cl G adaptation of the USEPA method 330.5 and Standard Method 4500-Cl G adaptation of the phenol red method
Light Source		tungsten lamp
Light Detector		silicon photocell and 525 nm narrow band interference filter
Environment		0 to 50°C / 32 to 122°F; max RH 100%
Battery Type		1 x 9V
Auto-off		after 10 minutes of non use
Dimensions		192 x 104 x 52 mm
Weight		380 g



Hard Carrying Case

Mi411 comes complete in hard carrying case, making it ideal for field measurements.

Accessories

- Mi504-100** Free & Total Chlorine reagent set (100 tests)
- Mi509-100** pH reagent (100 tests)
- Mi511-100** Free & Total Chlorine and pH reagent set (100 tests)
- Mi524-100** Total Chlorine powder reagents (100 tests)
- Mi526-100** Free Chlorine powder reagents (100 tests)

- Mi0001** Glass cuvettes (2 pcs)
- Mi0002** Caps for cuvettes (2 pcs)
- Mi0003** Stoppers for cuvettes (2 pcs)



Ordering Information

Mi411 is supplied complete with 2 cuvettes, Mi511-100 liquid reagents for 100 tests, hard carrying case, wiping tissue, 9V battery and instructions.

Mi405/Mi407/Mi408/Mi412

Ammonia, Iron & Phosphate Photometers

These user-friendly Colorimeters will give you direct readings in mg/L.

Ammonia detection in water treatment systems is particularly important for aquarium owners and fish farm operators.





Ammonia is highly soluble in water and extremely toxic to fish. Fish farm owners must monitor and maintain careful control of ammonia levels to ensure optimum water conditions for their stock. Milwaukee offers 2 instruments for low and medium concentrations: **Mi405** with a range of 0.00 to 9.99 mg/L and **Mi407** from 0.00 to 3.00 mg/L.

Iron is naturally present in water supplies and its presence in both potable and industrial applications is regarded as objectionable. Milwaukee offers **Mi408** Iron meter with a range of 0.00 to 5.00 mg/L.

Phosphates are present in natural waters and at concentrations typically found, do not pose any specific health threats to humans.

However, excessive contamination of water courses from agricultural fertilizer run off or wastewater/effluent discharge can promote excessive algae or plant growth. Milwaukee offers **Mi412** with range 0.00 to 2.50 mg/L.



Specifications		 Mi405 Ammonia MR	 Mi407 Ammonia LR	 Mi408 Iron HR	 Mi412 Phosphate LR
Range	Ammonia Iron Phosphate	0.00 to 9.99 mg/L ($\text{NH}_3\text{-N}$)	0.00 to 3.00 mg/L ($\text{NH}_3\text{-N}$)	0.00 to 5.00 mg/L (Fe)	0.00 to 2.50 mg/L (PO_4)
Resolution	Ammonia Iron Phosphate	0.01 mg/L	0.01 mg/L	0.01 mg/L	0.01 mg/L
Accuracy	Ammonia Iron Phosphate	± 0.10 mg/L @ 5.00 mg/L	± 0.04 mg/L @ 1.50 mg/L	± 0.03 mg/L @ 1.50 mg/L	± 0.04 mg/L @ 1.00 mg/L
Method		adaptation of Nessler method	adaptation of Nessler method	adaptation of the USEPA method 315 B and Standard method 3500 - Fe B	adaptation of the Ascorbic Acid method
Light Source		Blue LED 466 nm	Blue LED 466 nm	tungsten lamp	tungsten lamp
Light Detector		silicon photocell and 466 nm narrow band interference filter	silicon photocell and 466 nm narrow band interference filter	silicon photocell and 525 nm narrow band interference filter	silicon photocell and 610 nm narrow band interference filter
Environment		0 to 50°C / 32 to 122°F max RH 100%	0 to 50°C / 32 to 122°F max RH 100%	0 to 50°C / 32 to 122°F max RH 100%	0 to 50°C / 32 to 122°F max RH 100%
Battery Type		1 x 9 V	1 x 9 V	1 x 9 V	1 x 9 V
Auto-off		after 10 minutes of non-use	after 10 minutes of non-use	after 10 minutes of non-use	after 10 minutes of non-use
Dimensions		192 x 104 x 52 mm	192 x 104 x 52 mm	192 x 104 x 52 mm	192 x 104 x 52 mm
Weight		380 g	380 g	380 g	380 g

Accessories

Mi505-100 Ammonia MR liquid reagent (100 tests)
Mi507-100 Ammonia LR liquid reagent (100 tests)
Mi508-100 Iron HR liquid reagent (100 tests)
Mi512-100 Phosphate LR powder reagent (100 tests)

Mi0001
Mi0002
Mi0003

Glass cuvettes (2 pcs)
 Caps for cuvettes (2 pcs)
 Stoppers for cuvettes (2 pcs)



Ordering Information

Mi405, **Mi407**, **Mi408** and **Mi412** are supplied complete with 2 cuvettes, reagents for 100 tests, hard carrying case, wiping tissue, 9V battery and instructions.

Mi404/Mi406/Mi413/Mi414

Free & Total Chlorine and Chloride Photometers

Milwaukee provides a range of chlorine photometers for all applications: swimming pool treatments, household cleaners, dishwasher additives, laundry powders/liquids and cooling water treatment products all contain chlorine as an oxidizing biocide. Drinking water contains residual chlorine to maintain water purity throughout the supply lines.

Milwaukee offers 3 microprocessor-based instruments with greater resolution, better accuracy and immediate results.

You can choose between three different models:

Mi404 for measuring free (0.00 to 5.00 mg/L) and total (0.00 to 5.00 mg/L) chlorine, **Mi406** for measuring free (0.00 to 5.00 mg/L) chlorine and **Mi413** for measuring free (0.00 to 10.00 mg/L) and total (0.00 to 10.00 mg/L) chlorine.





Chloride is a major constituent of sea water and is extremely corrosive in acidic environments. It requires close monitoring in applications such as marine boiler systems that are effected by seawater contamination.

Chlorides are used by the water treatment professional to determine cycles of concentration in low pressure boilers and cooling systems.

It is essential to monitor chloride concentrations in boiler systems to prevent metal parts being damaged. In high levels, chloride can corrode stainless steel.

Milwaukee offers the **Mi414** microprocessor-based photometer for measuring chloride (0.00 to 20.00 mg/L).



Specifications		 Mi404 Free & Total Chlorine	 Mi406 Free Chlorine	 Mi413 Free & Total Chlorine HR	 Mi414 Chloride
Range	Free Chlorine Total Chlorine Chloride	0.00 to 5.00 mg/L (Cl ₂) 0.00 to 5.00 mg/L (Cl ₂)	0.00 to 5.00 mg/L (Cl ₂)	0.00 to 10.00 mg/L (Cl ₂) 0.00 to 10.00 mg/L (Cl ₂)	0.00 to 20.00 mg/L (Cl ⁻)
Resolution	Free Chlorine Total Chlorine Chloride	0.01 mg/L (0.00 to 3.50 mg/L); 0.10 mg/L (above 3.50 mg/L) 0.01 mg/L (0.00 to 3.50 mg/L); 0.10 mg/L (above 3.50 mg/L)	0.01 mg/L (0.00 to 3.50 mg/L); 0.10 mg/L (above 3.50 mg/L)	0.01 mg/L (0.00 to 3.50 mg/L); 0.10 mg/L (above 3.50 mg/L) 0.01 mg/L (0.00 to 3.50 mg/L); 0.10 mg/L (above 3.50 mg/L)	0.01 mg/L
Accuracy	Free Chlorine Total Chlorine Chloride	±0.04 mg/L @1.50 mg/L ±0.04 mg/L @1.50 mg/L	±0.04 mg/L @1.50 mg/L	±0.10 mg/L @5.00 mg/L ±0.10 mg/L @5.00 mg/L	±0.4 mg/L @10.0 mg/L
Method		adaptation of USEPA method 330.5 and Standard Method 4500-Cl G	adaptation of USEPA method 330.5 and Standard Method 4500-Cl G	adaptation of USEPA method 330.5 and Standard Method 4500-Cl G	adaptation of mercury (II) thiocyanate method
Light Source		tungsten lamp	tungsten lamp	tungsten lamp	Blue LED 466 nm
Light Detector		silicon photocell and 525 nm narrow band interference filter	silicon photocell and 525 nm narrow band interference filter	silicon photocell and 525 nm narrow band interference filter	silicon photocell and 466 nm narrow band interference filter
Environment		0 to 50°C / 32 to 122°F max RH 100%	0 to 50°C / 32 to 122°F max RH 100%	0 to 50°C / 32 to 122°F max RH 100%	0 to 50°C / 32 to 122°F max RH 100%
Battery Type		1 x 9 V	1 x 9 V	1 x 9 V	1 x 9 V
Auto-off		after 10 minutes of non-use	after 10 minutes of non-use	after 10 minutes of non-use	after 10 minutes of non-use
Dimensions		192 x 104 x 52 mm	192 x 104 x 52 mm	192 x 104 x 52 mm	192 x 104 x 52 mm
Weight		380 g	380 g	380 g	380 g

Accessories

Mi504-100 Free & Total Chlorine liquid reagent set (100 tests)

Mi506-100 Free Chlorine liquid reagent set (100 tests)

Mi513-045 Free & Total Chlorine liquid reagent set (45 tests)

Mi514-100 Chloride liquid reagent set (100 tests)

Mi524-100 Total Chlorine powder reagents (100 tests)

Mi526-100 Free Chlorine powder reagents (100 tests)

Mi0001 Glass cuvetts (2 pcs)

Mi0002 Caps for cuvetts (2 pcs)

Mi0003 Stoppers for cuvetts (2 pcs)



Ordering Information

Mi404, Mi406, Mi413 and Mi414 are supplied complete with 2 cuvetts, reagents, hard carrying case, wiping tissue, 9V battery and instructions.

Years
warranty
2Self
diagnostics

LED

CE



MW10/MW11

Low cost digital photometers to measure Free & Total Chlorine



Chlorine is the most commonly used water disinfectant. Applications vary from treatment of drinking water and wastewater to pool and spa sanitization and food processing to sterilization.

Milwaukee offers 2 models:

MW10 for measuring free chlorine (0.00 to 2.50 mg/L) and **MW11** to measure total chlorine (0.00 to 3.50 mg/L).

Key features include:

- User friendly;
- Smaller & Ergonomic case design;
- Inexpensive;
- Larger and Easier to read Display;
- Good accuracy and immediate results;

Specifications	 MW10 Free chlorine	 MW11 Total chlorine
Range	0.00 to 2.50 ppm	0.00 to 3.50 ppm
Resolution	0.01 ppm	0.01 ppm
Accuracy (@25°C)	±0.03 ppm ±3% of reading	±0.03 ppm ±3% of reading
Typical EMC Dev.	±0.01 ppm	±0.01 ppm
Light Source	Light Emitting Diode @ 525 nm	Light Emitting Diode @ 525 nm
Light Detector	Silicon Photocell	Silicon Photocell
Method	Adaptation of USEPA method 330.5. The reaction between free chlorine and the DPD reagent causes a pink tint in the sample.	Adaptation of USEPA method 330.5. The reaction between free chlorine and the DPD reagent causes a pink tint in the sample.
Environment	0 to 50°C (32 to 122°F) max. 95% RH non-condensing	0 to 50°C (32 to 122°F) max. 95% RH non-condensing
Battery Type	1 x 1.5V AAA	1 x 1.5V AAA
Auto-off	after 2 minutes of non use	after 2 minutes of non use
Dimensions	81.5 x 61 x 37.5 mm (3.2 x 2.4 x 1.5")	81.5 x 61 x 37.5 mm (3.2 x 2.4 x 1.5")
Weight	64 g (2.25 oz.)	64 g (2.25 oz.)



They are supplied with 2 cuvettes, 6 reagents, a battery and instruction manual.



Accessories

2720116 Free Chlorine powder reagent, (25 pcs)
2720216 Total Chlorine powder reagent (25 pcs)



Mi0011 Glass cuvettes (2 pcs)
Mi0013 Stoppers for cuvettes (2 pcs)

Ordering information:

All handy photometers are supplied in a carton box including 2 cuvettes, 6 powder reagents, 1 x 1.5 V AAA battery and instructions.

MW12/MW13/MW14




Low cost digital photometers to measure Phosphate, Iron & Iodine

Iron is naturally present in water supplies and therefore needs to be monitored both in potable and industrial applications. Milwaukee offers the **MW14** Iron meter with a range of 0.00 to 5.00 mg/L.

Phosphates are present in natural waters and at concentrations typically found, do not pose any specific health threats to humans. However, excessive contamination of water courses from agricultural fertilizer run off or wastewater/effluent discharge can promote excessive algae or plant growth. Milwaukee offers **MW12** with a range of 0.00 to 2.50 mg/L.


Iodine is used as disinfectant in various applications - one of the most common is the poultry industry waste water treatment. Milwaukee offers **MW13** with a range of 0.0 to 12.5 mg/L.



Specifications	 MW12 Phosphate	 MW13 Iodine	 MW14 Iron
Range	0.00 to 2.50 ppm	0.0 to 12.5 ppm	0.00 to 5.00 ppm
Resolution	0.01 ppm	0.1 ppm	0.01 ppm
Accuracy (@25°C)	±0.04 ppm ±4% of reading	±0.1 ppm ±5% of reading	±0.04 ppm ±2% of reading
Typical EMC Dev.	±0.01 ppm	±0.1 ppm	±0.01 ppm
Light Source	LED @ 525 nm	LED @ 525 nm	LED @ 525 nm
Light Detector	Silicon Photocell	Silicon Photocell	Silicon Photocell
Method	Adaptation of the Standard Methods for the Examination of Water and Wastewater, 20th edition, Ascorbic Acid method. The reaction between phosphate and the reagent causes a blue tint in the sample.	Adaptation of the Standard Methods for the Examination of Water and Wastewater, 18th edition, DPD method. The reaction between iodine and the reagent causes a pink tint in the sample.	Adaptation of the EPA Phenantroline method 315B, for natural and treated waters. The reaction between iron and reagent causes an orange tint in the sample.
Environment	0 to 50°C (32 to 122°F) max 95% RH non-condensing	0 to 50°C (32 to 122°F) max 95% RH non-condensing	0 to 50°C (32 to 122°F) max 95% RH non-condensing
Battery Type	1 x 1.5V AAA	1 x 1.5V AAA	1 x 1.5V AAA
Auto-off	after 2 minutes of non use	after 2 minutes of non use	after 2 minutes of non use
Dimensions	81.5 x 61 x 37.5 mm (3.2 x 2.4 x 1.5")	81.5 x 61 x 37.5 mm (3.2 x 2.4 x 1.5")	81.5 x 61 x 37.5 mm
Weight	64 g (2.25 oz.)	64 g (2.25 oz.)	64 g (2.25 oz.)

Accessories

- 2720115** Phosphate powder reagent, (25 pcs)
2720316 Iodine powder reagent (25 pcs)
2720416 Iron powder reagent, (25 pcs)



- Mi0011** Glass cuvetts (2 pcs)
Mi0013 Stoppers for cuvetts (2 pcs)

Ordering information:

All handy photometers are supplied in a carton box including 2 cuvetts, 6 powder reagents, 1 x 1.5 V AAA battery and instructions.

Peroxide Value in the process of oil making

CE



Mi490 is a user-friendly photometer for monitoring peroxide value in the process of oil making. This instrument will give you direct readings, with a range of 0.0 to 25.0 meq O_2 /Kg.

The measurement of the oil's chemical degradation is the peroxide value, which measures the degree to which the oil is oxidized. Rancidification is the decomposition of fats and other lipids by hydrolysis and/or oxidation. Hydrolysis will split fatty acid chains away from the glycerol backbone in glycerides. These free fatty acids can then undergo further auto-oxidation. Oxidation primarily occurs with unsaturated fats by a free radical-mediated process.

One of the most widely used tests for oxidative rancidity, peroxide value is a measure of the concentration of peroxides and hydroperoxides formed in the initial stages of lipid oxidation. Milliequivalents of peroxide per kg of fat are measured by titration with iodide ion.

Peroxide values are not static and care must be taken in handling and testing samples. It is difficult to provide a specific guideline relating peroxide value to rancidity. High peroxide values are a definite indication of a rancid fat, but moderate values may be the result of depletion of peroxides after reaching high concentrations.

Easy Steps

Prepare the sample with oil and the reagent then insert it in the instrument and note the reading.

Accurate Readings

Mi490 will give you direct readings, with a range of 0.0 to 25.0 meq O_2 /Kg in the process of oil making.



Specifications	Mi490 Peroxide Value
Range	0.0 to 25.0 meq O_2 /Kg
Resolution	0.5 meq O_2 /Kg
Accuracy	± 0.5 meq O_2 /Kg
Method	adaptation of the CE n. 2568/97 method
Environment	0 to 50°C; max RH 95%
Battery Type	4 x 1.5V AA
Auto-off	after 15 minutes of non-use
Dimensions	225 x 85 x 80 mm
Weight	0.5 kg



Accessories

Mi590-021 Peroxides reagent set (21 tests)

Ordering Information

Mi490 is supplied complete with: reagents for 20 tests, 4 x 1 mL syringe, tissue for wiping cuvetts, 4 x 1.5V AA batteries and instruction manual.

Mi415

Turbidity Meter

Turbidity refers to the concentration of undissolved, suspended particles present in a liquid. Turbidity is a measure of the clarity of a sample. For potable water applications turbidity is a good indicator of water quality.

Turbidity Measurement is achieved by analyzing the amount of light refracted from suspended particles such as clay, silt and organic material. By measuring turbidity, by photometric or tube methods, it is possible to estimate suspended solids content.

Mi415 has two operating ranges; 0.00 to 50.00 FNU, and 50 to 1000 FNU that can accommodate the most turbid condition you may encounter.

Mi415 is supplied in a hard carrying case, complete with calibration solutions.



Specifications	Mi415 Turbidity meter
Range	0.00 to 50.00 FNU; 50 to 1000 FNU
Resolution	0.01 FNU; 1 FNU
Accuracy	±0.5 FNU or ±5% of reading, whichever is greater
Method	detection of scattered light
Light Source	high emission infrared LED
Light Detector	silicon photocell
Environment	0 to 50°C 32 to 122°F; max RH 100%
Battery Type	1 x 9V
Auto-off	after 5 minutes of non-use
Dimensions	192 x 104 x 52 mm
Weight	380 g

Introduction to Turbidity

The cloudy appearance of water (called Turbidity) is caused by suspended material. The unit of measure adopted by the ISO Standard is the FNU (Formazine Nephelometric Unit) and by EPA is NTU (Nephelometric Turbidity Unit).

The other two methods used to test for turbidity and their measurement units are the JTU (Jackson Turbidity Unit) and the Silica unit (mg/L SiO₂).

See the conversion table of these methods and their units for your reference.



(mg/L)	JTU	FTU (NTU/FNU)	SiO ₂
JTU	1	19	2.5
FTU	0.053	1	0.13
SiO ₂	0.4	7.5	1

Accessories

Mi515-100 AMCO-AEPA-1 @ 0 FNU calibration solution, 30 mL
Mi0011 AMCO-AEPA-1 @ 10 FNU, calibration solution, 30 mL
Mi0012 AMCO-AEPA-1 @ 500 FNU, calibration solution, 30 mL



Mi0011 Glass cuvettes (2 pcs)
Mi0012 Caps for cuvettes (2 pcs)
Mi0013 Stoppers for cuvettes (2 pcs)

Ordering Information

Mi415 is supplied complete with 2 cuvettes, calibration solutions, hard carrying case, wiping tissue, 9V battery and instructions.

MA871/MA872/MA873/MA881 Digital Refractometers for Brix, Fructose, Glucose and Invert Sugar Measurements



The digital refractometers are optical instruments that employ the measurement of refractive index to determine the % Brix of sugar (**MA871**), % Fructose (**MA872**), % Glucose (**MA873**) and % Invert Sugar (**MA881**) in aqueous solutions.





The method is both simple and quick. Samples are measured after a simple user calibration with deionized or distilled water. Within seconds the instruments measure the refractive index of the sample and convert it to % Brix or % by weight concentration units.

The digital refractometers eliminate the uncertainty associated with mechanical refractometers and are easily portable for measurements in the field.

The measurement technique and temperature compensation employ methodology recommended in the ICUMSA Methods Book (Internationally recognized body for Sugar Analysis). Temperature (in °C or °F) is displayed simultaneously with the measurement on the large dual level display along with icons for Low Power and other helpful message codes.

Key features include:

- Dual-level LCD
- Automatic Temperature Compensation (ATC)
- Easy setup and storage
- Battery operation with Low Power indicator (BEPS)
- Automatically turns off after 3 minutes of non-use

Specifications	 MA871 Brix	 MA872 Fructose	 MA873 Glucose	 MA881 Invert Sugar
Range	0 to 85% Brix 0 to 80°C / 32 to 176°F	0 to 85% mass 0 to 80°C / 32 to 176°F	0 to 85% mass 0 to 80°C / 32 to 176°F	0 to 85% mass 0 to 80°C / 32 to 176°F
Resolution	0.1% Brix 0.1°C / 0.1°F	0.1% 0.1°C / 0.1°F	0.1% 0.1°C / 0.1°F	0.1% 0.1°C / 0.1°F
Accuracy	±0.2% Brix ±0.3°C / ±0.5°F	±0.2% ±0.3°C / ±0.5°F	±0.2% ±0.3°C / ±0.5°F	±0.2% ±0.3°C / ±0.5°F
Light source	yellow LED	yellow LED	yellow LED	yellow LED
Measurement Time	approximately 1.5 seconds	approximately 1.5 seconds	approximately 1.5 seconds	approximately 1.5 seconds
Minimum Sample Volume	100 µL (cover prism totally)	100 µL (cover prism totally)	100 µL (cover prism totally)	100 µL (cover prism totally)
Sample Cell	SS ring and flint glass prism	SS ring and flint glass prism	SS ring and flint glass prism	SS ring and flint glass prism
Temperature Compensation	automatic between 10 and 40°C / 50 to 104°F	automatic between 10 and 40°C / 50 to 104°F	automatic between 10 and 40°C / 50 to 104°F	automatic between 10 and 40°C / 50 to 104°F
Case Material	ABS	ABS	ABS	ABS
Battery Type	1 x 9V AA (included)	1 x 9V AA (included)	1 x 9V AA (included)	1 x 9V AA (included)
Battery Life	5000 reading	5000 reading	5000 reading	5000 reading
Auto-shut off	after 3 minutes of non-use	after 3 minutes of non-use	after 3 minutes of non-use	after 3 minutes of non-use
Dimensions	192 x 102 x 67 mm	192 x 102 x 67 mm	192 x 102 x 67 mm	192 x 102 x 67 mm
Weight	420 g	420 g	420 g	420 g

Ordering Information

MA871, MA872, MA873 and **MA881** are supplied in a carton box, complete with 9V battery and instruction manual.



Stainless Steel Sample Well and Prism

Place a few drops of the sample in the well and press the READ key.



MA882/MA883/MA884/MA885

Digital Refractometers for Grape Juice Must Measurements

The **MA882**, **MA883**, **MA884** and **MA885** are optical instruments that are based on the measurement of the refractive index of a solution. The measurement of refractive index is simple and quick and provides the vintner an accepted method for sugar content analysis. Samples are measured after a simple user calibration with deionized or distilled water. Within seconds the instrument measures the refractive index of the grape. This digital refractometers eliminate the uncertainty associated with mechanical refractometers and are easily portable for measurements in the field.

The four instruments utilize internationally recognized references for unit conversion and temperature compensation.





- **MA882** measures %Brix;
- **MA883** measures °Baumé;
- **MA884** measures %Brix and Potential Alcohol (% vol);
- **MA885** measures %Brix, °Oechsle (°Oe) and °KMW (°Babo).

Temperature (in °C or °F) is displayed simultaneously with the measurement on the large dual level display along with icons for Low Power and other helpful message codes.

Key features include:

- Dual-level LCD
- Automatic Temperature Compensation (ATC)
- Easy setup and storage
- Battery operation with Low Power indicator (BEPS)
- Automatically turns off after 3 minutes of non-use



Specifications	 MA882	 MA883	 MA884	 MA885
Range	0 to 50% Brix 0 to 80°C / 32 to 176°F	0 to 28 °Baumé 0 to 80°C / 32 to 176°F	0 to 50% Brix 0 to 25% v/v Potential Alc. 0 to 80°C / 32 to 176°F	0 to 50% Brix 0 to 230 °Oechsle 0 to 42 °KMW 0 to 80°C / 32 to 176°F
Resolution	0.1% Brix 0.1°C / 0.1°F	0.1 °Baumé 0.1°C / 0.1°F	0.1% Brix 0.1% v/v Potential Alcohol 0.1°C / 0.1°F	0.1% Brix 0.1 °Oechsle 0.1 °KMW 0.1°C / 0.1°F
Accuracy	±0.2% Brix ±0.3°C / ±0.5°F	±0.1 °Baumé ±0.3°C / ±0.5°F	±0.2% Brix ±0.2 v/v Potential Alcohol ±0.3°C / ±0.5°F	±0.2% Brix ±1 °Oechsle ±0.2 °KMW ±0.3°C / ±0.5°F
Light Source	yellow LED	yellow LED	yellow LED	yellow LED
Measurement Time	approximately 1.5 seconds	approximately 1.5 seconds	approximately 1.5 seconds	approximately 1.5 seconds
Minimum Sample Volume	100 µL (cover prism totally)	100 µL (cover prism totally)	100 µL (cover prism totally)	100 µL (cover prism totally)
Sample Cell	SS ring and flint glass prism	SS ring and flint glass prism	SS ring and flint glass prism	SS ring and flint glass prism
Temperature Compensation	automatic between 10 and 40°C / 50 to 104°F	automatic between 10 and 40°C / 50 to 104°F	automatic between 10 and 40°C / 50 to 104°F	automatic between 10 and 40°C / 50 to 104°F
Case Material	ABS	ABS	ABS	ABS
Battery Type	1 x 9V AA (included)	1 x 9V AA (included)	1 x 9V AA (included)	1 x 9V AA (included)
Battery Life	5000 reading	5000 reading	5000 reading	5000 reading
Auto-shut off	after 3 minutes of non-use	after 3 minutes of non-use	after 3 minutes of non-use	after 3 minutes of non-use
Dimensions	192 x 102 x 67 mm	192 x 102 x 67 mm	192 x 102 x 67 mm	192 x 102 x 67 mm
Weight	420 g	420 g	420 g	420 g

Ordering Information

MA882, **MA883**, **MA884** and **MA885** are supplied in a carton box, complete with 9V battery and instruction manual.



MA886 Digital Refractometer for Sodium Chloride Measurements



The **MA886** is an optical instrument that employs the measurement of the refractive index to determine sodium chloride concentration in aqueous solutions used in food preparation.

It is not intended for sea water salinity measurements. The measurement of refractive index is simple and quick and provides the user an accepted method for NaCl analysis. Samples are measured after a simple user calibration with deionized or distilled water. Within seconds the instrument measures the refractive index of the solution.

The digital refractometer eliminates the uncertainty associated with mechanical refractometers and is easily portable for measurements where you need them.

The instrument utilizes internationally recognized references for unit conversion and temperature compensation. It can display the measurement of NaCl concentration 4 different ways: g/100 g, g/100 mL, Specific Gravity, and °Baumé. Temperature (in °C or °F) is displayed simultaneously with the measurement (on 3 of the ranges) on the large dual level display along with icons for Low Power and other helpful message codes.

Key features include:

- Dual-level LCD
- Automatic Temperature Compensation (ATC)
- Easy setup and storage
- Battery operation with Low Power indicator (BEPS)
- Automatically turns off after 3 minutes of non-use

Specifications	MA886
Range	0 to 28 g/100 g 0 to 34 g/100 ml 1.000 to 1.216 Specific Gravity 0 to 26 °Baumé 0 to 80°C / 32 to 176°F
Resolution	0.1 g/100 g 0.1 g/100 ml 0.001 Specific Gravity 0.1 °Baumé 0.1°C / 0.1°F
Accuracy	±0.2 g/100 g ±0.2 g/100 ml ±0.002 Specific Gravity ±0.2 °Baumé ±0.3°C / ±0.5°F
Light Source	yellow LED
Measurement Time	approximately 1.5 seconds
Minimum Sample Volume	100 µL (cover prism totally)
Sample Cell	SS ring and flint glass prism
Temperature Compensation	automatic between 10 and 40°C (50 to 104°F)
Case Material	ABS
Battery Type	1 x 9V AA (included)
Battery Life	5000 reading
Auto-shut off	after 3 minutes of non-use
Dimensions	192 x 102 x 67 mm
Weight	420 g

Ordering Information

MA886 is supplied in a carton box, complete with 9V battery and instruction manual.



Stainless Steel Sample Well and Prism

Place a few drops of the sample in the well and press the READ key.

Liquid Crystal Display (LCD)

Dual Level LCD with Primary and Secondary Display.



Measuring salt in cheese

Using MA886 Digital Sodium Chloride Refractometer

Sodium occurs naturally in many foods and is also added in the form of salt. The sodium content of food has important implications for health. Sodium is a nutrient and is part of the group of dietary minerals. Essential to life, it cannot be produced by the human body and thus has to be provided by the diet. The physiological requirements of sodium of the human body are relatively low (estimated at the equivalent of 1 to 2 gram of salt per day) and are met by the diet.



Fresh cheeses (non-salted) contain very little sodium (from 30 to 60 mg /100g). Hard cheeses – because of added salt – contain much higher levels of sodium (from 200 to 1600 mg/100g). Within a family of cheeses and depending on the brands, large variations exist between sodium contents of the cheeses, depending on lower or higher addition of salt by the cheese maker.

Measuring salt (sodium chloride) in cheese



1. Dicing:

Mincing the sample increases the surface area to allow as much salt to be released into the water as possible.



2. Dilution:

Dilute the sample with hot water to a 10% ratio.


After the sample melted, the fat will float to the top.

3. Collect the sample with a pipette from the layer underneath the fat

For optimal measurement put a sample into a beaker.



4. Using the plastic pipette, drip sample onto the prism surface. Fill the well completely.



5. Press the READ key.

The results are displayed in unit of interest



Digital Refractometer for Seawater Measurements



The **MA887** is an optical instrument that employs the measurement of the refractive index to determine the salinity of natural and artificial seawater, ocean water or brackish intermediates.

The digital refractometer eliminates the uncertainty associated with mechanical refractometers and is easily portable for ship, shore or home use.

The **MA887** refractometer is an optical device that is simple and quick to use. Samples are measured after a simple user calibration with distilled or deionized water. Within seconds, the refractive index and temperature are measured and converted into one of three popular measurement units; Practical Salinity Units (PSU), Salinity in parts per thousand (ppt), or Specific Gravity (S.G. (20/20)).

All conversion algorithms are based upon respected scientific publications using the physical properties of seawater (not sodium chloride). The temperature (in °C or °F) is also displayed on the large dual level display along with helpful message codes.

Key features include:

- Dual-level LCD
- Automatic Temperature Compensation (ATC)
- Easy setup and storage
- Battery operation with Low Power indicator (BEPS)
- Automatically turns off after 3 minutes of non-use

Specifications	MA887
Range	0 to 50 PSU 0 to 150 ppt 1.000 to 1.114 S.G. (20/20) 0 to 80°C / 32 to 176°F
Resolution	1 PSU 1 ppt 0.001 S.G. (20/20) 0.1°C / 0.1°F
Accuracy	±2 PSU ±2 ppt ±0.002 S.G. (20/20) ±0.3°C / 0.5°F
Light Source	yellow LED
Measurement Time	approximately 1.5 seconds
Minimum Sample Volume	100 µL (cover prism totally)
Sample Cell	SS ring and flint glass prism
Temperature Compensation	automatic between 10 and 40°C (50 to 104°F)
Case Material	ABS
Battery Type	1 x 9V AA (included)
Battery Life	5000 reading
Auto-shut off	after 3 minutes of non-use
Dimensions	192 x 102 x 67 mm
Weight	420 g

Ordering Information

MA887 is supplied in a carton box, complete with 9V battery and instruction manual.



Stainless Steel Sample Well and Prism

Place a few drops of the sample in the well and press the READ key.

Liquid Crystal Display (LCD)

Dual Level LCD with Primary and Secondary Display.



MA888

Digital Refractometer for Ethylene Glycol Measurements

The **MA888** is an optical instrument that employs the measurement of the refractive index to determine the % volume and freezing point of ethylene glycol based coolants or antifreeze.

The digital refractometer eliminates the uncertainty associated with mechanical refractometers and is easily portable for use in the field to optimize your cooling system.

The **MA888** refractometer is an optical device that is simple and quick to use. Samples are measured after a simple user calibration with distilled or deionized water. Within seconds, the refractive index and temperature are measured and converted into one of two measurement units; % Volume or Freezing Point.

The instrument utilizes internationally recognized references for unit conversion and temperature compensation for ethylene glycol solutions (e.g. CRC Handbook of Chemistry and Physics, 87th Edition).

The temperature (in °C or °F) is also displayed on the large dual level display along with helpful message codes.

Key features include:

- Dual-level LCD
- Automatic Temperature Compensation (ATC)
- Easy setup and storage
- Battery operation with Low Power indicator (BEPS)
- Automatically turns off after 3 minutes of non-use



Years
warranty
2

ATC

Dual
Display


Self
diagnostics

CE

Specifications	MA888
Range	0 to 100% Volume 0 to -50°C / 32 to -58°F Freezing Point 0 to 80°C / 32 to 176°F
Resolution	0.1% Volume 0.1°C / 0.1°F Freezing Point 0.1°C / 0.1°F
Accuracy	±0.2% Volume ±0.5°C / ±1.0°F Freezing Point ±0.3°C / ±0.5°F
Light Source	yellow LED
Measurement Time	approximately 1.5 seconds
Minimum Sample Volume	100 µL (cover prism totally)
Sample Cell	SS ring and flint glass prism
Temperature Compensation	automatic between 10 and 40°C (50 to 104°F)
Case Material	ABS
Battery Type	1 x 9V AA (included)
Battery Life	5000 reading
Auto-shut off	after 3 minutes of non-use
Dimensions	192 x 102 x 67 mm
Weight	420 g

Ordering Information

MA888 is supplied in a carton box, complete with 9V battery and instruction manual.



Stainless Steel Sample Well and Prism

Place a few drops of the sample in the well and press the READ key.

Liquid Crystal Display (LCD)

Dual Level LCD with Primary and Secondary Display.



pH600/CD600/CD601/CD610/CD611/CD97 pH/EC & TDS Economical Pocket Testers

CE









Milwaukee's economical testers are easy-to-use and low cost instruments to measure quick and reliable pH, EC or TDS values.

Measuring electrical conductivity is the best way of checking the amount of salt or dissolved solids (TDS) in water. Milwaukee provides you with a range of pocket testers that will allow you to measure from very low to very high conductivity solutions.

All EC/TDS testers compensate for the temperature variance automatically.



Specifications	 pH600	 CD600	 CD601
Range	0.0 to 14.0 pH	0 to 1990 ppm	0 to 1990 µS/cm
Resolution	0.1 pH	10 ppm	10 µS/cm
Accuracy	±0.1 pH	±2% Full scale	±2% Full scale
Calibration	manual, 1 point	manual, 1 point	manual, 1 point
Temperature Compensation		automatic from 5 to 50°C	automatic from 5 to 50°C
Environment	0 to 50°C / 32 to 122°F; max RH 95%	0 to 50°C / 32 to 122°F; max RH 95%	0 to 50°C / 32 to 122°F; max RH 95%
Battery Type / Battery Life	3 x 1.5V alkaline / 700 hours of use	4 x 1.5V alkaline / 350 hours of use	4 x 1.5V alkaline / 350 hours of use
Dimensions / Weight	150 x 30 x 24 mm / 85 g	150 x 30 x 24 mm / 85 g	150 x 30 x 24 mm / 85 g

Specifications	 CD610	 CD611	 CD97
Range	0 to 10000 ppm	0 to 20000 µS/cm	0 to 1000 ppm
Resolution	100 ppm	100 µS/cm	1 ppm
Accuracy	±2% Full scale	±2% Full scale	±10 ppm
Calibration	manual, 1 point	manual, 1 point	manual, 1 point
Temperature Compensation	automatic from 5 to 50°C	automatic from 5 to 50°C	automatic from 5 to 50°C
Environment	0 to 50°C / 32 to 122°F; max RH 95%	0 to 50°C / 32 to 122°F; max RH 95%	0 to 50°C / 32 to 122°F; max RH 95%
Battery Type / Battery Life	4 x 1.5V alkaline / 350 hours of use	4 x 1.5V alkaline / 350 hours of use	4 x 1.5V alkaline / 350 hours of use
Dimensions / Weight	150 x 30 x 24 mm / 85 g	150 x 30 x 24 mm / 85 g	150 x 30 x 24 mm / 85 g

Accessories

- M10004B** pH 4.01 buffer solution 20 mL sachet (25 pcs)
- M10007B** pH 7.01 buffer solution 20 mL sachet (25 pcs)
- M10010B** pH 10.01 buffer solution, 20 mL sachet (25 pcs)
- M10030B** 12880 µS/cm calibration solution, 20 mL (25 pcs)

- M10031B** 1413 µS/cm calibration solution, 20 mL (25 pcs)
- M10032B** 1382 ppm (mg/L) calibration solution, 20 mL (25 pcs)
- M10038B** 6.44 ppt (g/L) calibration solution, 20 mL (25 pcs)
- MA9015** Electrode storage solution, 230 mL
- MA9016** Electrode cleaning solution, 230 mL

Ordering Information

pH600, CD600, CD601, CD610, CD611 and CD97 are supplied in a plastic hard carrying case, complete with protective cap, calibration screwdriver, batteries and instructions.

TH300/TH310

Pocket-sized thermometers with automatic calibration check

Scientists and laboratory technicians rely on the accuracy of their thermometers when performing routine measurements. For this reason, Milwaukee developed the **TH310**. This palm-sized unit is a highly accurate thermometer that is destined to make glass thermometers obsolete.

Remote temperature measurements require a versatile thermometer with a remote probe that can be used in a hard-to-reach places. The meter must also be easily readable at an angle. The **TH300** is equipped with a stainless steel general purpose probe and 1 meter cable to make remote reading a simple task.

The thermometers have easy-to-read display which shows clear readings at any angle.

Specifications	TH300	TH310
Range	-50.0 to 150.0°C	-50.0 to 150.0°C
Resolution	0.1°C	0.1°C
Accuracy (@20°C)	±0.5°C (-20 to 90°C)	±0.5°C (-20 to 90°C)
Typical EMC Deviation	±0.3°C	±0.3°C
Probe	Stainless steel with 1 meter cable	Stainless steel
Switch ON/OFF	no	yes
Calibration Check	no	yes
Environment	0 to 50°C; max RH 95%	0 to 50°C; max RH 95%
Battery Type	1 x 1.4V	1 x 1.5V
Battery Life	approximately 1 year	approximately 3000 hours of continuous use
Dimensions	106 x 58 x 19 mm	66 x 50 x 25 mm
Weight	70 g	50 g



Ordering Information

TH310 is supplied with stainless steel probe with 1 meter cable, batteries and instruction manual.

TH300 is supplied with batteries and instruction manual.

MT6003

NPK Soil Test Kit

The primary nutrients essential to plant growth and quality are Nitrogen, Phosphorous and Potassium.

N is associated with plant growth above the ground, **P** is responsible for flower and fruit production as well as overall plant health. **K** promotes disease resistance, water intake and strong root growth.



This kit provides accurate and professional tests and includes 25 sachets of Nitrogen (MT5009), Phosphorous (MT5010) and Potassium (MT5002), 3 x 100 mL bottles of extraction solution and 5 plastic test tubes. All results are compared to standards on laminated colour charts.



Measuring pH in meat

Using MW102 pH portable meter
with a MA920B/1 pH electrode

The pH changes occurring in a carcass during the first 24 hours after slaughter are important for the quality of the final meat or meat products. Protein denaturation will occur if pH falls to too low a level or if a relatively low pH sets in at a time after slaughter where the carcass temperature is still high. This will result in meat with poor water holding capacity and in extreme cases in meat that is PSE.

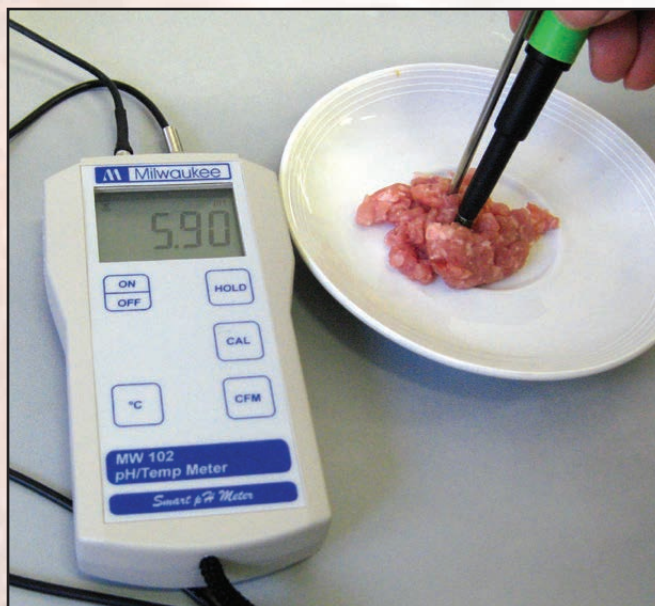

Calibrate the pH meter using pH 7 and pH 4 standardization buffers.

1. Cut meat sample into small pieces.




2. Weight approximately 10 grams into a blender cup. Run duplicates on each sample.




3. Add 100 ml of distilled deionized water and blend for 30 seconds on high speed.



4. Transfer sample to a beaker. Read the pH as soon as possible.



5. Add a stir bar to the beaker, turn on the stir plate and place the pH electrode in the sample. Wait for the ready light to come on before recording the pH value.





6. Blender cups, beakers and stir bars can be rinsed in distilled water between samples. The pH electrode should be rinsed with distilled water between each sample and periodically rinsed with acetone from a squeeze bottle to remove fat buildup.

How to clean pH Electrodes

The pH electrode needs to be cleaned in order to prevent build up of material on the surface of the glass bulb. Material building up on the glass bulb of the electrode will cause the calibration of the electrode to be inaccurate and any subsequent reading to be inaccurate.

The pH electrode should be cleaned generally depending on usage, once a day, once a week or at least once a month to prevent clogging and to maintain accuracy. Always clean it before calibration. Immerse just the glass membrane of the electrode in the MA9016 or M10016B General cleaning solution for about 10-15 minutes.



Never wipe the glass membrane because it can lead to permanent damage! DO NOT BE ALARMED IF ANY SALT DEPOSITS ARE PRESENT. This is normal with electrodes and they will disappear when rinsed with water.

Special cleaning methods:

Oil pluggins: clean by warm water with a detergent solution for 10-20 minutes.

Protein: use 1% pepsin and 0.1M HCl solution for 1 hour.

Sulfides: use 0.1M Thiourea/HCl solution for 15-60 minutes.

Alkaline deposits: it can be removed with weak acid or vinegar.

Acidic deposits: it can be removed with 0.1 molar NaOH.

After special cleaning you should clean the electrode in General cleaning solution for 5 minutes and then recondition it by storing in MA9015 storage solution for 1-2 hours. The pH electrode should be rinsed with distilled or deionized water, but never store it in these water.

To minimize clogging and ensure a quick response time, the glass bulb of the pH electrode and the junction should be kept moist. Replace protective cap with a few drops of a MA9015 Storage Solution.



Electrodes & Probes

pH, ORP, Conductivity, Dissolved Oxygen

Milwaukee has a wide assortment of pH, ORP, Conductivity and other specialty sensors to meet all your specific requirements.

Finding the right electrode for a specific application is a very important task and in order to solve this selection problem it is important to consider the following: electrode body, reference construction and junction.

Below you will find a list of Milwaukee electrodes and probes with corresponding instruments they are supplied with.



OTHER ELECTRODES & PROBES

	SE220	Double junction pH electrode with 1 meter cable and gel filled electrolyte solution (MW100 / MW101 / MW102)
	SE300	Double junction orp platinum electrode with 1 meter cable and gel filled electrolyte solution (MW500)
	SE510	Conductivity/TDS probe with 1 meter cable (MW301 / MW401)
	SE520	Conductivity/TDS probe with 1 meter cable (MW302 / MW402)
	SE600	Combination probe for pH/EC/TDS with 1 meter cable (MW801 / MW802)
	MA812/2	Conductivity/TDS probe with 2 meter cable (MC310 / MC410)
	MA814DB/1	4-ring Conductivity/TDS/NaCl/Temperature probe with DIN connector and 1 meter cable (Mi170 / Mi180)
	MA814D/1	4-ring Conductivity/TDS/NaCl/Temperature probe with DIN connector and 1 meter cable (Mi306)
	MA911B/1 MA911B/2	Double junction, gel filled pH electrode with BNC connector, 1 or 2 m cable
	MA914BR/1	pH/Temp amplified probe with 1 meter cable (Mi105)
	MA921B/2	Double junction, gel filled ORP electrode with platinum sensor, BNC connector, 2 m cable
	MA923D/1	pH/ORP/Temp amplified probe with 1 meter cable (Mi106)
	MA830R	Stainless steel Temperature probe (MW102)
	MA831R	Stainless steel Temperature probe (Mi150 / Mi151 / Mi160)
	MA840	Polarographic D.O. probe with 3 meter cable (MW600 / Mi605)
	MA851D/1	pH/Conductivity/TDS/Temperature amplified probe with DIN connector and 1 meter cable (Mi805 / Mi806)


Electrode Selection Guide

pH, ORP, Conductivity, Dissolved Oxygen

Milwaukee has a wide assortment of pH, ORP, Conductivity and other specialty sensors to meet all your specific requirements.

Before selecting an electrode, please consult the table below. The recommended electrodes are the ones best suited to each application, however we also ask you to verify the specifications on pages 6-7-8-9

Special electrodes for specific applications can also be manufactured upon request.

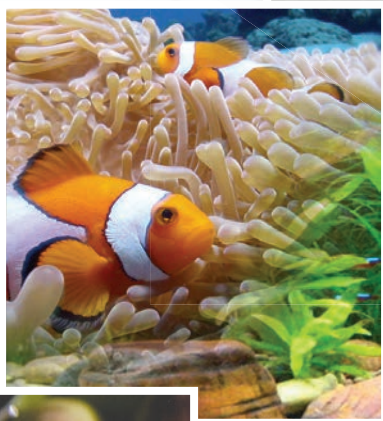

Applications	pH	MA905B/3	MA911B/2	SE220	MA913B/3	MA914BR/1	MA915B/2	MA916B/1	MA916B/3	MA917B/1	MA918B/1	MA919B/1	MA920B/1	MA923D/1	MA991B/1	ORP	MA921B/1	SE300	MA923B/3	MA924B/1	Conductivity	SE510	D.O.	MA840
Agriculture / Soil testing																								
Aquarium																								
Cheese																								
Dairy products																								
Emulsions																								
Environmental, Pollution																								
Fish farming																								
Food and beverage (general use)																								
Galvanizing waste solution																								
Hi purity water																								
Heavy duty applications																								
In-line applications																								
Laboratory (general use)																								
Meat																								
Paints																								
Paper																								
Photographic chemicals																								
Strong acid																								
Swimming pools																								
Water supply																								
Wine processing																								



Calibration, Maintenance & Cleaning Solutions

Milwaukee offers a wide range of calibration, maintenance & Cleaning solutions.

The use of calibration and cleaning solutions is fundamental for the correct use of electrodes and for obtaining the most accurate and reproducible readings. Often readings are not correct because the sensors have not been properly handled.

Milwaukee standard solutions are available in 230 mL bottles and 20 mL sachets.

Traditional buffer solutions are packed in 230 mL leak-proof bottles and are recommended for lab applications.

Sachets are sealed against light and air and are ideal for on-the-spot calibration.

Simply open, insert the tester or electrode into the sachet and calibrate. Sachets are sold in boxes of 25 pieces.


Calibration, Maintenance & Cleaning Solutions

MA9001	pH 1.68 Calibration Buffer Solution, 230 mL
MA9004	pH 4.01 Calibration Buffer Solution, 230 mL
MA9006	pH 6.86 Calibration Buffer Solution, 230 mL
MA9007	pH 7.01 Calibration Buffer Solution, 230 mL
MA9009	pH 9.18 Calibration Buffer Solution, 230 mL
MA9010	pH 10.01 Calibration Buffer Solution, 230 mL
MA9011	Refilling Electrolyte Solution 3.5M KCl for pH/ORP electrodes, 230 mL
MA9012	Refilling Electrolyte Solution 1M KNO ₃ , 230 mL, food applications
MA9015	Storage Solution for pH/ORP electrodes, 230 mL
MA9016	Cleaning Solution for pH/ORP electrodes, 230 mL
MA9020	200-275 mV ORP Solution, 230 mL
MA9060	12880 µS/cm Conductivity Calibration Solution, 230 mL
MA9061	1413 µS/cm Conductivity Calibration Solution, 230 mL
MA9062	1382 ppm TDS Calibration Solution, 230 mL
MA9063	84 µS/cm Conductivity Calibration Solution, 230 mL
MA9064	80000 µS/cm Conductivity Calibration Solution, 230 mL


MA9065	111.8 mS/cm Conductivity Calibration Solution, 230 mL
MA9066	100% NaCl Calibration Solution, 230 mL
MA9069	5000 µS/cm Conductivity Calibration Solution, 230 mL
MA9070	Zero Oxygen Solution, 500 mL + 12 g
MA9071	Electrolyte Solution for D.O. Probes, 230 mL
MA9112	pH 12.45 Calibration Buffer Solution, 230 mL
M10000B	Rinse Solution - Deionized Water (box of 25x20 ml sachet)
M10004B	pH 4.01 Calibration Buffer Solution (box of 25x20 ml sachet)
M10007B	pH 7.01 Calibration Buffer Solution (box of 25x20 ml sachet)
M10010B	pH 10.01 Calibration Buffer Solution (box of 25x20 ml sachet)
M10016B	Cleaning Solution for electrodes (box of 25x20 ml sachet)
M10030B	12880 µS/cm Calibration Buffer Solution (box of 25x20 ml sachet)
M10031B	1413 µS/cm Calibration Buffer Solution (box of 25x20 ml sachet)
M10032B	1332 ppm TDS Calibration Solution (box of 25x20 ml sachet)
M10038B	6.44 ppt TDS Calibration Solution (box of 25x20 ml sachet)

pH Electrode Storage and Maintenance

Plastic body pH electrode

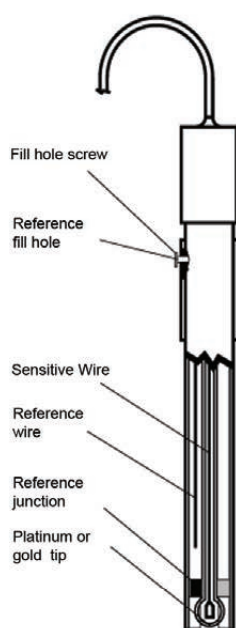

Glass body pH electrode

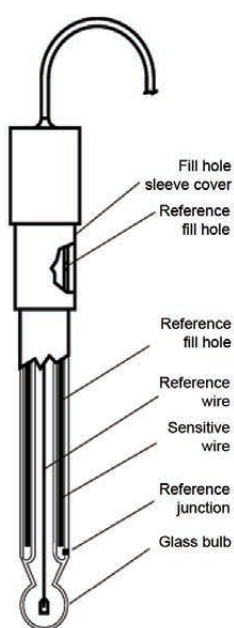

pH Electrode Storage and Maintenance

To ensure a quick response and free-flowing liquid junction, the sensing element and reference junction must not be allowed to dry out. The following instructions apply to refillable electrodes. For gel-filled electrodes, consult instruction manual.

Routine Storage

Soak electrode in a pH Electrode Storage Solution (MA9015). If a storage solution is unavailable, pH 4 buffer or pH 7.01 may be used. The fill hole should be covered to prohibit evaporation of reference fill solution.

Maintenance

Cleaning your electrode between and after use will help extend the life of your electrode and avoid the cost of early replacement.

Routine Cleaning

Soak electrode in MA9016 cleaning solution for half an hour, followed by soaking it in storage solution (MA9015) for at least two hours.

Weekly Maintenance

Inspect electrodes for scratches, cracks, salt crystal buildup, or membrane/junction deposits.

Rinse off any salt buildup with distilled water, and remove any membrane/junction deposits as directed in cleaning procedures below. The reference chamber should be drained, flushed with fresh filling solution, and refilled.

WARRANTY POLICY

Milwaukee warrants its instruments to be free of manufacturing defects as follows: bench meters for 3 years, portable and pocket testers for 2 years and electrode/sensors for 6 months (unless otherwise specified).

The warranty period commences from the original date of sale to the user. Warranty is valid only when the product is used under normal conditions and in accordance with the operating limitations and prescribed maintenance procedures.

Milwaukee reserves the right to make improvements in design, construction and appearance of its products without advance notice.

Instrument service

Warranty and non-warranty service are performed by our technicians in Milwaukee headquarters. All items must have a Return Goods Authorization (RGA) number before returning the goods. This number can be obtained by contacting the Milwaukee technical service department at:

tech@milwaukeeinst.com

All products returned without an RGA number will be refused.



FURTHER INFORMATION

Latest updates on new products, technical tips, download MSDS and free software updates

Visit our website at:

www.Siampollutek.com

for the latest updates on new products, technical tips, download of MSDS, as well as free software updates.


SPECIFIC APPLICATION LITERATURE

Latest updates on new products, technical tips, download MSDS and free software updates

Specific application catalogues and leaflets are also available. Please kindly send us an e-mail at:

info@siampollutek.com

Bench Meters

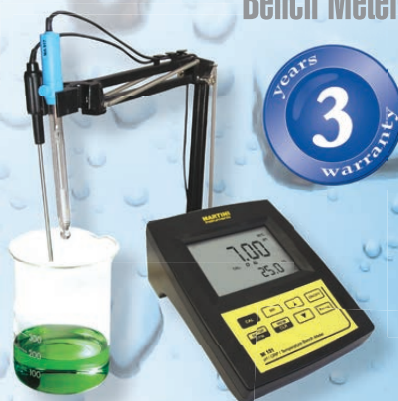

Portable Meters





Instruments for Water Analysis



pH

ORP

EC

TDS

DO

NaCl

Temp

Brix

NH₃-N

O₂/Kg

FNU

PO₄

Cl₂

Cl⁻

Fe

Measurements made Easy

Authorized Distributor



www.milwaukeeinst.com