

Real Spectrum Sensor



PL SERIES

Features & Benefits

- Highly accurate real-time water quality information
- Data rich, full scanning UV-VIS sensor (190-750 nm)
- Wastewater to high purity measurement ranges
- Multiple parameter configuration available
- Simple optical measurements, no reagents

Measurement Principle

The sensors utilize UV-VIS light between 190-750 nm for measurement, continuously scanning the water every minute of every day collecting hundreds of data points. The PL series sensors benefit from Real Tech's innovative Split-Sense Pro technology that compensates for lamp drift and fluctuations, providing an accurate and stable output overtime. PL series sensor parameters include BOD, COD, TOC, DOC, UV254, UVT, TSS, NO₃, NO₂, algae, permanganate, chromium, colour, dyes, pesticides, oil in water, diesel fuel, BTEX, black liquor, soaps, surfactants, H₂S, O₃, contaminant alarms, spectral fingerprint, custom alarms and more, dependant on application and industry.

APPLICATIONS

- Municipal Drinking Water
- Municipal Wastewater
- Industrial Process Water
- Industrial Wastewater

Versatile and Configurable

PL SERIES UV-VIS SENSORS

The PL series sensors are designed to meet the needs of any monitoring application by offering multiple sensor path length selections for the desired measurement range.

CONTROLLERS AND ACCESSORIES

Real Tech's modular approach allows a system to be configured around the ideal sensor with controller options and various accessory products, including automatic chemical cleaning systems that lower maintenance while improving system performance and dilution systems that extend the measurement range for highly concentrated wastewaters. We can truly meet the physical demands of any installation, wastewater or high purity, to ensure reliable, continuous operation.

CUSTOM DATA ANALYTICS

With the right sensor and hardware configuration, we then use custom data analysis and machine learning algorithms to bring true meaning to the data. This technique ensures accuracy and reliability so our clients can have the utmost confidence in their results. The longer our systems are installed, the smarter they become as they continue to learn the characteristics of the site-specific water.


Specifications

CHARACTERISTIC	TECHNICAL DATA					
Model	PL2010	PL2020	PL2040	PL2080	PL4025	PL4050
Path Length	1 mm	2 mm	4 mm	8 mm	25 mm	50 mm
Parameters	BOD, COD, TOC, DOC, UV254, UVT, TSS, nitrate, nitrite, algae, permanganate, chromium, colour, dyes, pesticides, oil in water, diesel fuel, BTEX, black liquor, soaps, surfactants, H ₂ S, O ₃ , contaminant alarms, spectral fingerprint, custom alarm					
Units	Parameter specific (mg/L, cm ⁻¹ , % or PCU)					
Sampling Time	1 minute					
Calibration	In-situ zeroing to DI water					
Cleaning	In-situ chemical cleaning or optional automatic chemical cleaning					
Self-Diagnostics	Detection and diagnosis of internal system fault					
Alarms	Dry contact terminals allow for operator configurable alarms for: high and low set points, low lamp output, leak detected, system fault, etc.					
Humidity Control	Humidity sensor with large plug-in regenerating desiccant system					
Wavelengths	Full scanning between 190-750 nm					
Light Source	Deuterium and Tungsten					
Lamp Life	4000 hrs. each					
Dimensions	19.0"H x 20.5"W x 9.0"D					
Enclosure	NEMA 4, wall mountable					
Flow Rate	300-1000 mL/min					
Pressure Rating	20 PSI					
Fluid Connections	1/4" tube push-in fittings					
Electrical/Comm.	From controller					
Storage Temp.	-20 to 60°C (-4 to 140°F)					
Operating Temp.	0 to 45°C (32 to 113°F)					
Weight	44 lbs					
Technology	Split-Sense Pro					
Warranty	2-year limited warranty (Extended care packages available)					

* Technical Specifications are subject to change without notice.

Dimensions

PL sensors are bypass cabinet instruments installed directly on a wall, railing or system backboard. Sample is supplied to the sensor from either a pressurized source or from an open-channel using an accessory pumping system.

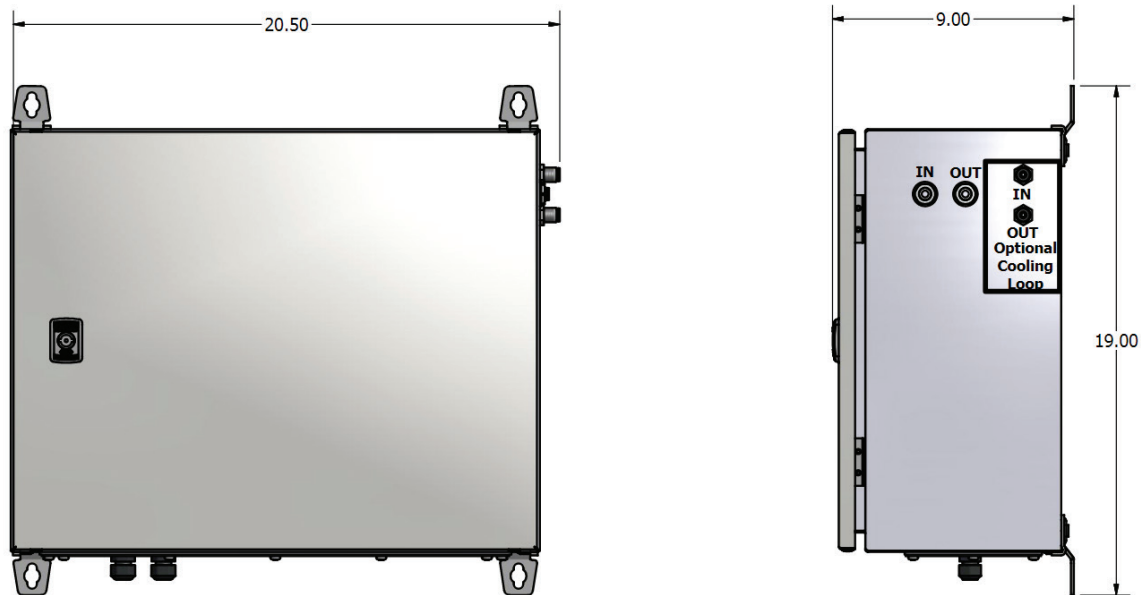

Models & Range

PL series models include UV-VIS sensor, flow cell, calibration bottle and dehumidifier. Controller and accessories sold separately.

MODEL #	PATH LENGTH	UV254 (cm ⁻¹)	BOD (mg/L)	COD (mg/L)	TOC (mg/L)	DOC (mg/L)	COLOUR (PCU)	NO ₃ -N (mg/L)	NO ₃ (mg/L)	NO ₂ -N (mg/L)
PL2010	1 mm	0 - 20	0 - 1500	0 - 3000	0 - 1200	0 - 800	0 - 6000	0 - 50	0 - 220	0 - 50
PL2020	2 mm	0 - 10	0 - 750	0 - 1500	0 - 600	0 - 400	0 - 3000	0 - 25	0 - 110	0 - 25
PL2040	4 mm	0 - 5	0 - 375	0 - 750	0 - 300	0 - 200	0 - 1500	0 - 12.5	0 - 55	0 - 12.5
PL2080	8 mm	0 - 2.5	0 - 187	0 - 375	0 - 150	0 - 100	0 - 750	0 - 6.25	0 - 27.5	0 - 6.25
PL4025	25 mm	0 - 0.8	0 - 60	0 - 120	0 - 48	0 - 32	0 - 240	0 - 2	0 - 8.8	0 - 2
PL4050	50 mm	0 - 0.4	0 - 30	0 - 60	0 - 24	0 - 16	0 - 120	0 - 1	0 - 4.4	0 - 1

* Stated ranges are approximate, dependent on industry, site and application - contact Real Tech to confirm model selection

* Range for algae, permanganate, chromium, dyes, pesticides, oil in water, diesel fuel, BTEX, black liquor, soaps, surfactants, H₂S, O₃, contaminant alarms, spectral fingerprint, custom alarm are site specific, contact Real Tech for details

* Higher maximum range possible with use of Dilution System option

Controllers

PRODUCT #	NAME	DESCRIPTION
S-11TPC	Smart Sense Controller	Wall mounted controller with touch panel PC interface and Smart Sense software for sensors (PC inside cabinet model)
S-11TPCD	Smart Sense Controller	Wall mounted controller with touch panel PC interface and Smart Sense software for sensors (PC external on door model)

Accessories

PRODUCT #	NAME	DESCRIPTION
UVT-078130	Real Clean System I	Automatic chemical cleaning system for use with 2000 and 3000 series models
UVT-118010	Real Clean System II	Automatic chemical cleaning system for use with 4000 series models
UVT-079121	Pump Clean System I	Self-priming pump and automatic chemical cleaning for use with 2000 and 3000 series models
UVT-129122	Pump Clean System II	Self-priming pump and automatic chemical cleaning for use with 4000 series models
S-159124	Air Purge Clean System I	Automatic chemical cleaning, air purge and pump (vertical lift less than 8 ft and pumping distance less than 25ft)
S-179125	Air Purge Clean System II	Automatic chemical cleaning, air purge and booster pump (vertical lift exceeds 8ft or pumping distance exceeds 25 ft)
S-179126	Air Purge Clean System III	Automatic chemical cleaning and air purge. Client supplies pump or water is pressurized
S-169092	Dilution System I	Dilution system, automatic chemical cleaning, air purge and pump (vertical lift less than 8 ft and pumping distance less than 25ft)
S-179093	Dilution System II	Dilution system, automatic chemical cleaning, air purge and booster pump (vertical lift exceeds 8ft or pumping distance exceeds 25 ft)
S-179094	Dilution System III	Dilution system, automatic chemical cleaning and air purge. Client supplies pump or water is pressurized



Siam Pollutek Co., Ltd

40/25 Soi Wachiratham-satit 8, Sukmvit 101/1 , Bangna , Bangkok 10260
Tel 02- 7478234, Fax 02-7477566, E-mail : info@siampollutek.com
Web : www.siampollutek.com, Line ID : siam.pollutek

REALTECH
INC.

REALTECHWATER.COM